

SMJ6-6W Series

6W 2:1 Regulated Single & Dual output

SCHMID-M

Features

- Wide 2:1 Input Range
- 1.75"X1.1"X0.28" metal case size
- Thin Profile
- Full SMD Technology
- 500 VAC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 88%
- -40 ~ 85°C Operation Temperature Range
- Over Voltage Protection
- Soft Start
- Without Tantalum Capacitors inside



The SMJ6-6W series are a family of high performance 6W single & dual output DC/DC converters. These converters are made with nickel-coated brass case in a 1.75"x1.1"X0.28" with high performance features such as 500 VAC input/output isolation voltage. The high performance features include: high efficiency and tight line/load regulation. Input voltages of 05, 12, 24 and 48 with output voltage of 3.3, 5, 12, 15, ±12, ±15. High performance features include high efficiency operation up to 88% and output voltage accuracy of ±1% maximum.



All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS		GENERAL SPECIFICATIONS	
Output Voltage Accuracy	±1%	Efficiency	See table, typ
Maximum Output Current	See table	I/O Isolation Voltage(3 sec)	
Line Regulation	±0.5%, max	Input/Output	500Vac
Load Regulation(Io=0% to 100%)	±1%, max(balanced load)	Metal Case/Input & Output	500Vac
Cross Regulation (Dual Output) (1)	±5%	I/O Isolation Capacitance	1000 pF Max.
Ripple&Noise (2)	75mVp-p, max	I/O Isolation Resistance	500VDC 50M Ohms
	3.3V output 3.9V	Switching Frequency	Typical 330kHz
	5V output 6.2V	Humidity	95% rel H
Over Voltage Protection	12V output 15V	Reliability Calculated MTBF(MIL-HDBK-217 F)	>1.28 Mhrs
(Zener diode clamp)	15V output 18V	Safety Standard :(designed to meet)	IEC/EN 60950-1
	±12V output ±15V		
	±15V output ±18V		
Over Current Protection	185% of FL, typ	PHYSICAL SPECIFICATIONS	
Short Circuit Protection	Indefinite(hiccup) (Automatic Recovery)	Case Material	Nickel-coated Copper
Temperature Coefficient	±0.02%/°C	Pin Material	Ø1.0mm Brass Solder-coated
Capacitive Load (3)	See table	Weight	25.0g,max
Transient Response Deviation(4)	±3%, max	Dimensions	1.75"x1.1"x0.28"
INPUT SPECIFICATIONS		ENVIRONMENT SPECIFICATIONS	
Voltage Range	See table	Operating Temperature	-40°C~85°C(See Derating Curve)
Max. Input Current	See table		-40°C~60°C(For 100% load)
No-Load Input Current	See table	Maximum Case Temperature	100°C
Start up Time	20mS, max	Storage Temperature	-40°C~125°C
(Minimum Vin and constant resistive load)		Cooling	Nature Convection
Input Filter	PI Type	ABSOLUTE MAXIMUM RATINGS(6)	
Input Reflected Ripple Current(5)	20mA pk-pk	These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
		Input Voltage(100mS)	
		05 Models	-0.7~15 Vdc
		12 Models	-0.7~36 Vdc
		24 Models	-0.7~50 Vdc
		48 Models	-0.7~100 Vdc
		Soldering Temperature	260°C max.
		(1.5mm from case 10sec. Max.)	

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, SCHMID-MULTITECH accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

SMJ6 - 6W 2:1 Regulated Single & Dual output

PART NUMBER STRUCTURE



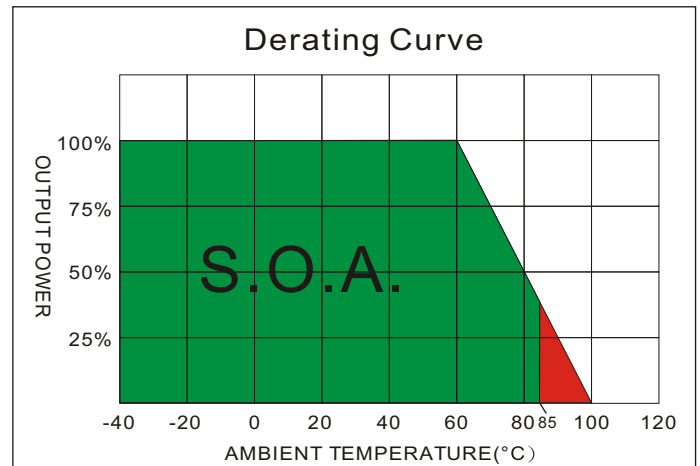
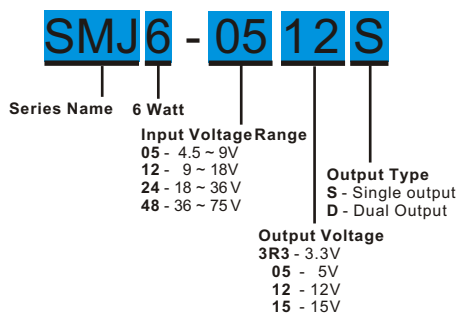


MODEL SELECTION GUIDE




MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(μF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
SMJ6-053R3S	4.5-9	45	904	3.3	0	1000	73	1000
SMJ6-0505S	4.5-9	45	1315	5	0	1000	76	1000
SMJ6-0512S	4.5-9	45	1518	12	0	500	79	680
SMJ6-0515S	4.5-9	45	1518	15	0	400	79	680
SMJ6-0512D	4.5-9	50	1500	±12	0	±250	82	±220
SMJ6-0515D	4.5-9	50	1500	±15	0	±200	82	±220
SMJ6-123R3S	9-18	25	361	3.3	0	1000	76	1000
SMJ6-1205S	9-18	25	617	5	0	1200	81	1200
SMJ6-1212S	9-18	25	588	12	0	500	85	680
SMJ6-1215S	9-18	25	588	15	0	400	85	470
SMJ6-1212D	9-18	15	581	±12	0	±250	88	±220
SMJ6-1215D	9-18	15	581	±15	0	±200	88	±220
SMJ6-243R3S	18-36	25	226	3.3	0	1200	73	1200
SMJ6-2405S	18-36	25	312	5	0	1200	80	1200
SMJ6-2412S	18-36	25	297	12	0	500	84	680
SMJ6-2415S	18-36	25	290	15	0	400	86	470
SMJ6-2412D	18-36	10	290	±12	0	±250	88	±220
SMJ6-2415D	18-36	10	290	±15	0	±200	88	±220
SMJ6-483R3S	36-75	25	111	3.3	0	1200	74	1200
SMJ6-4805S	36-75	25	156	5	0	1200	80	1200
SMJ6-4812S	36-75	25	148	12	0	500	84	680
SMJ6-4815S	36-75	25	147	15	0	400	85	470
SMJ6-4812D	36-75	6	147	±12	0	±250	87	±220
SMJ6-4815D	36-75	6	145	±15	0	±200	88	±220

NOTE

1. One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
2. Typical value at nominal input voltage and full load, measured by 20MHz oscilloscope.
3. Test by nominal input voltage and constant resistive load.
4. Tested by normal Vin and 50% load step change (100%-50% of Io, 50%-0% of Io).
5. Measured Input reflected ripple current with a simulated source inductance of 12uH.
6. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.

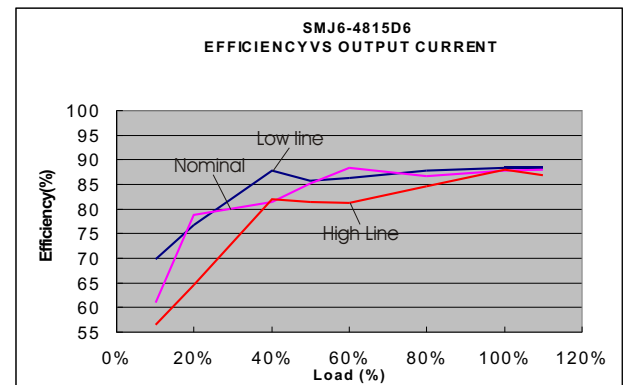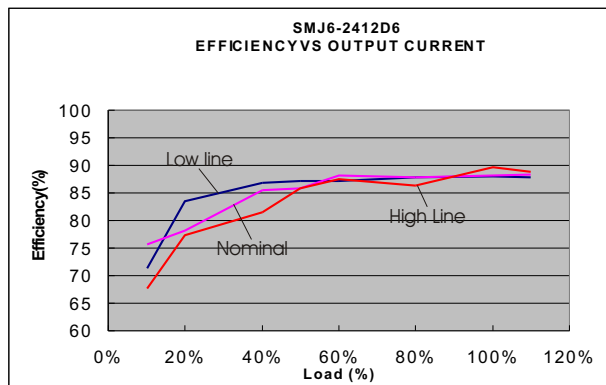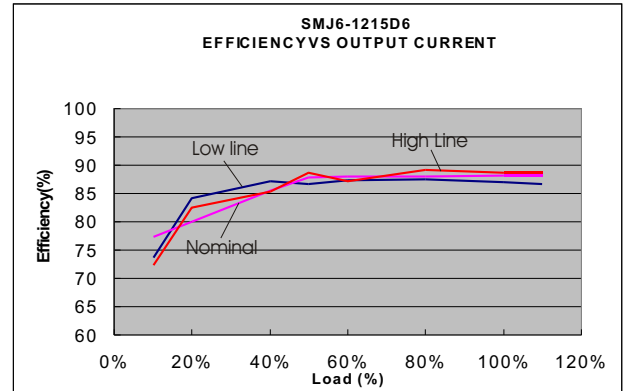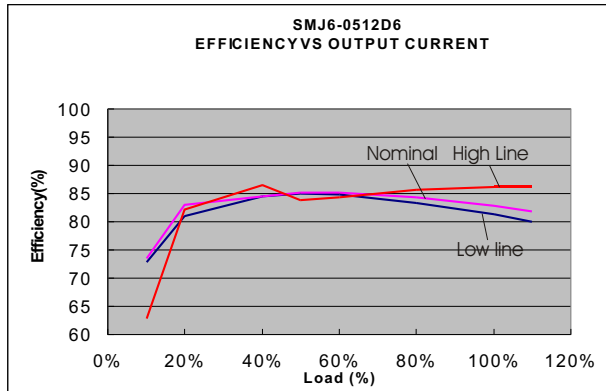

MECHANICAL SPECIFICATIONS

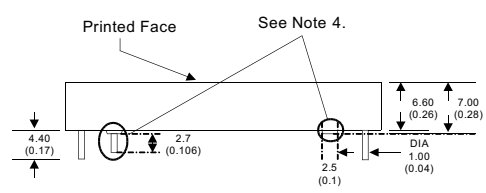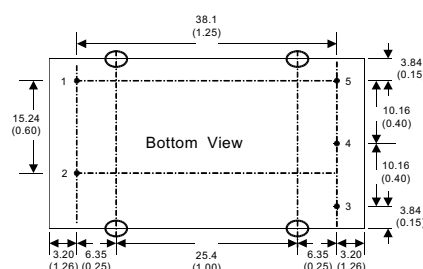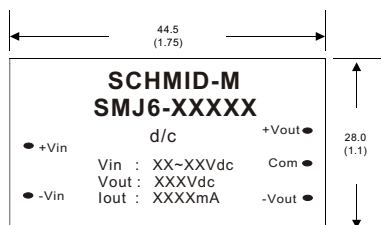

- Notes :
- 1. All dimensions are typical in millimeters (inches).
 - 1. Pin diameter: 1.0 ± 0.05 (0.04 ± 0.002)
 - 2. Pin pitch tolerance: ± 0.35 (± 0.014)
 - 3. Case Tolerance: ± 0.5 (± 0.02)
 - 4. The converter is in contact with the slanted area of the P.C.B. To keep isolation, adequate wiring on the mounted side is required.

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
1	-V Input	-V Input
2	+V Input	+V Input
3	+V Output	+V Output
4	N.P	Common
5	-V Output	-V Output