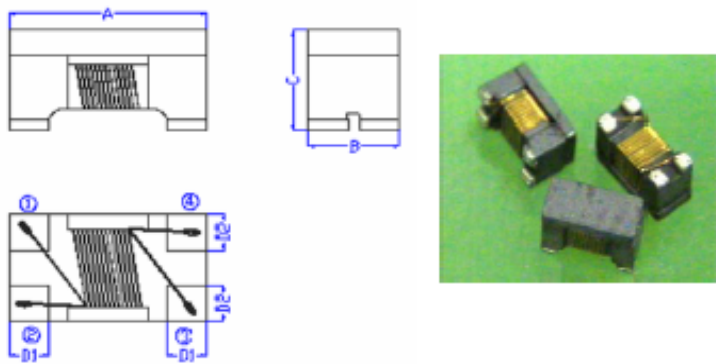


NEW PRODUCT

SWCM-1210 HS series

ORDERING CODE:	SWCM-1210HS-250T	K.C.P/N:	
<p>(1) SHAPE:</p> 		A	1.2±0.2 mm
		B	1.0±0.2 mm
		C	0.9±0.2 mm
		D1	0.36Typ mm
		D2	0.38Typ mm
<p>(2) ELECTRICAL REQUIREMENTS:</p> <ol style="list-style-type: none"> COMMON MODE IMPEDANCE(Ω) : 25±25% (100MHz) RDC : 0.25Ω(max) IDC : 420mA(max) CUT -OFF FREQUENCY : 7.5 GHz(Typ) 		<p>(3) TEST CONDITIONS:</p> <ol style="list-style-type: none"> IMPEDANCE : HP 4291B RDC: HIOKI 3540 (SINGLE WIRE TEST) IDC: HP4284A+HP42841A CUT -OFF FREQUENCY: E5071C 	

www.schmid-m.com

info@schmid-m.com