

Non-isolated & Regulated 10A, 16A Single Output POL Power Converter

FEATURES

- High efficiency up to 96%
- Operating ambient temperature range -40°C ~ +85°C
- Input under-voltage protection, output short-circuit, over-current protection
- High-speed transient response
- Compact SMD package



SK12T-10A, 16A series is a 10A, 16A non-isolated switching regulator. The output voltage is accurately adjustable from 0.75V to 5.0V, and the product is featured with high efficiency, fast transient response, input under-voltage, output short circuit, over-current protection. They meet CLASS B of CISPR32/EN55032 EMI standards by adding the recommended external components and they are widely used in applications such as communications, computer network industry, power distributed architecture, workstations, servers, LANs/WANs and provide high current with fast transient response for high-speed chips such as FPGA, DSP, and ASIC.

Selection Guide

Part No.	Input Voltage (VDC)		Output		Efficiency(%) Min./Typ.	Capacitive Load(μF) Max.	
	Nominal (Range)	Max.*	Voltage(VDC) (Range)	Current (A) Max./Min.		1 mΩ ≤ ESR < 10 mΩ	ESR ≥ 10 mΩ
SK12T-10A-P	12 (8.3~14)	15	0.75~5.0	10/0	93/96	5000	6000
SK12T-10A-N							
SK12T-16A-P				16/0	92/95	5000	6000
SK12T-16A-N							

Notes: * 1. Exceeding the maximum input voltage may cause permanent damage;
2. Unless otherwise specified, parameters in this table were measured under the 5VDC output voltage.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (no-load)	Nominal input voltage	--	70	--	mA
Start-up Voltage		--	--	8.3	VDC
Under-voltage Protection		6.0	--	--	
Reverse Polarity Input		Avoid / Not protected			
Hot Plug		Unavailable			
Input Filter		Capacitance filter			
Ctrl*	Module on	SK12T-10A-P, SK12T-16A-P (Positive logic)		Ctrl pin open or pulled high (Vin-2.5VDC ~ Vin)	
		SK12T-10A-N, SK12T-16A-N (Negative logic)		Ctrl pin pulled low to GND (0 ~ 0.5VDC)	
	Module off	SK12T-10A-P, SK12T-16A-P (Positive logic)		Ctrl pin pulled low to GND (0 ~ 0.5VDC)	
		SK12T-10A-N, SK12T-16A-N (Negative logic)		Ctrl pin open or pulled high (Vin-2.5VDC ~ Vin)	
	Input current when off	--	2	--	mA

Notes: * 1. The Ctrl pin voltage is referenced to GND.
2. Unless otherwise specified, parameters in this table were measured under the 5VDC output voltage.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy	Full load, nominal input voltage	--	±1.0	±2.0	%
Linear Regulation	Full load, input voltage range	--	±0.3	--	
Load Regulation	Nominal input, 0% - 100% load	--	±0.4	--	
Ripple & Noise*	20MHz bandwidth, nominal input, 100% load	--	65	100	mVp-p
Trim		0.75	--	5.0	VDC

DC/DC Converter

SK12T-10A, 16A Series

Sense			--	--	110	%Vo
Transient Response Deviation	Nominal input, 50%-100%-50% load step change, di/dt=2.5A/us, with external 470 μF polymer capacitors	SK12T-10A	--	±75	--	mV
		SK12T-16A	--	±100	--	mV
Transient Recovery Time		SK12T-10A, SK12T-16A	--	20	--	us
Over-current Protection	Nominal input	SK12T-10A	--	320	--	%Io
		SK12T-16A	--	200	--	%Io
Short-circuit Protection	Nominal input	Continuous, self-recovery				
Temperature Coefficient	100% load		--	±0.02	--	%/°C

Notes: * 1. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.
2. Unless otherwise specified, parameters in this table were measured under the 5VDC output voltage.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	
Storage Humidity	Non-condensing	5	--	95	%RH
Reflow Soldering Temperature		Peak temp. Tc ≤245°C, maximum duration time ≤60s over 217°C. For actual application, please refer to IPC/JEDEC J-STD-020D.1.			
Switching Frequency	Full load, nominal input voltage input	--	300	--	KHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours

Mechanical Specifications


Dimensions	33.00 x 13.50 x 8.30mm
Weight	8.6g (Typ.)
Cooling Method	Free air convection or forced convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 Class B (see Fig.3 for recommended circuit)	
	RE	CISPR32/EN55032 Class B (see Fig.3 for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2 Contact ±6KV	perf. Criteria B

Typical Characteristic Curves


SK12T-10A Series Temperature Derating Curves

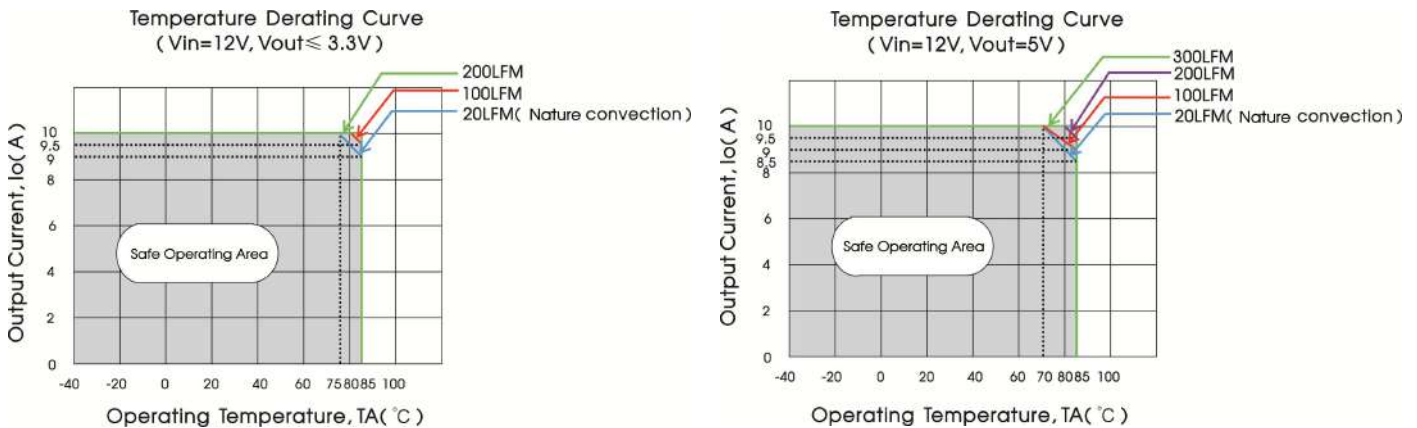


DC/DC Converter

SK12T-10A, 16A Series

SK12T-16A Series Temperature Derating Curves

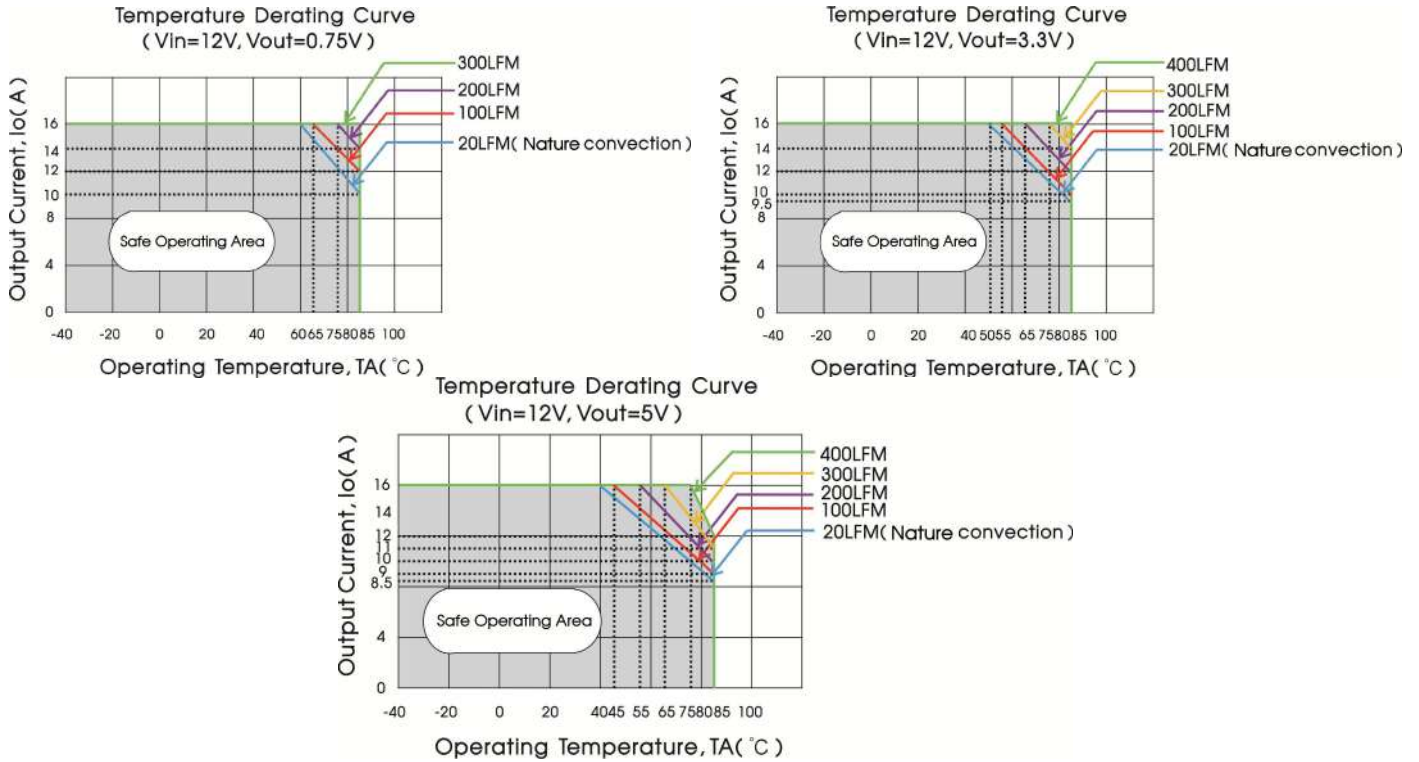

SK12T-10A Series Efficiency Curves

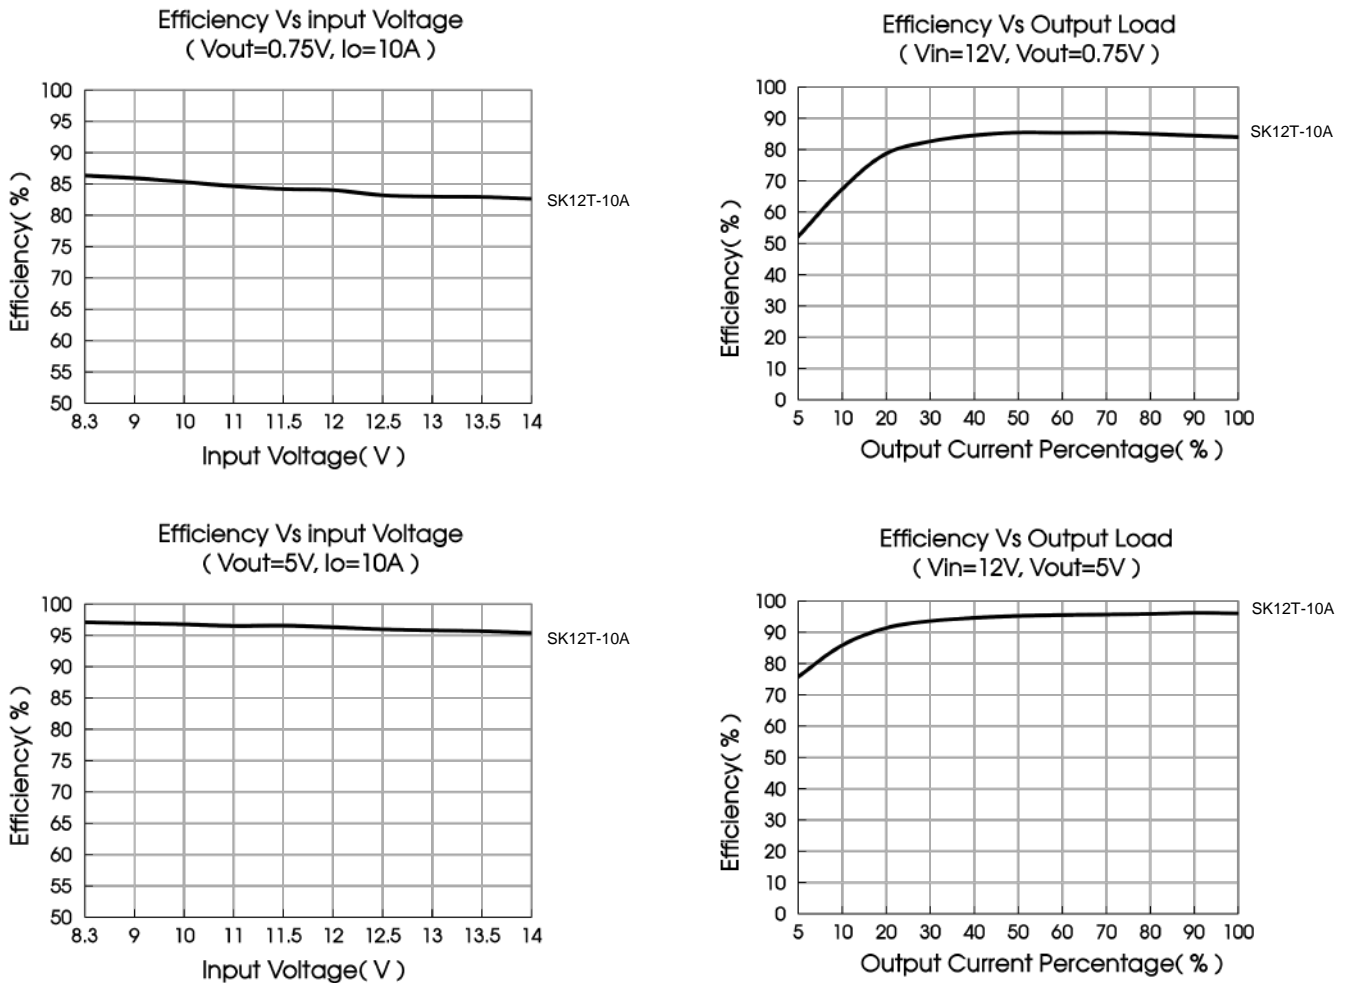

DC/DC Converter

SK12T-10A, 16A Series

SK12T-16A Series Efficiency Curves

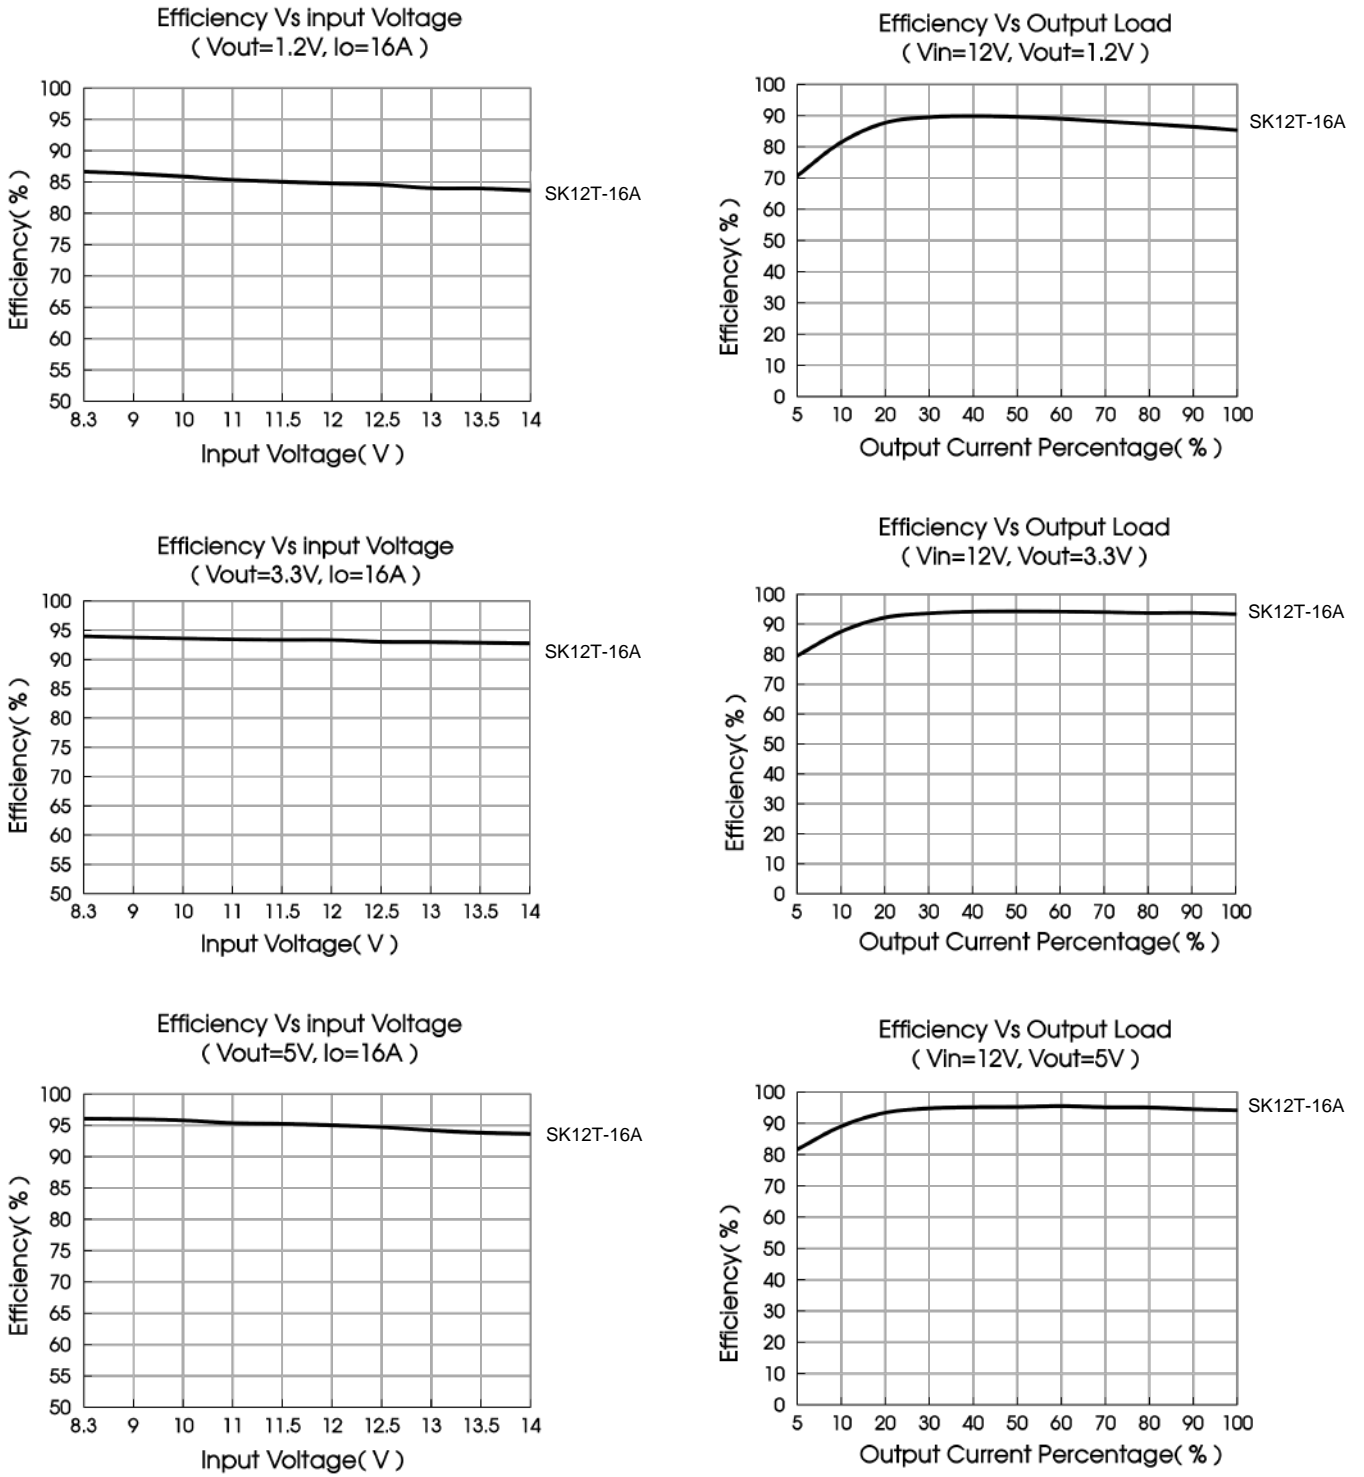



Fig. 1

DC/DC Converter

SK12T-10A, 16A Series

Remote Sense Application


1. Remote Sense Connection if not used

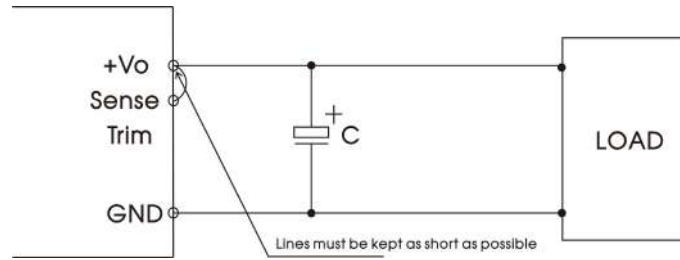

Notes:

1. If the sense function is not used for remote regulation the user must connect the Sense to +Vo at the DC-DC converter pins and will compensate for voltage drop across pins only.
2. The connections between Sense and +Vo must be kept as short as possible, otherwise they may be picking up noise, interference and/or causing unstable operation of the power module.

2. Remote Sense Connection used for Compensation

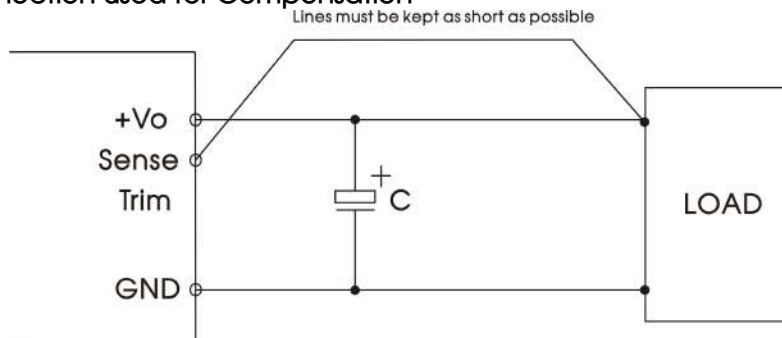

Notes:

1. PCB-tracks or cables/wires for Remote Sense must be kept as short as possible.
2. Using remote sense with long wires long wires may cause unstable operation. Note that large wire impedance may cause oscillation of the output voltage and/or increased ripple. Consult technical support or factory for further advice of sense operation.
3. We recommend using adequate cross section for PCB-track layout and/or cables to connect the power supply module to the load in order to keep the voltage drop below 0.3V and to make sure the power supply's output voltage remains within the specified range.

Design Reference

1. Typical application

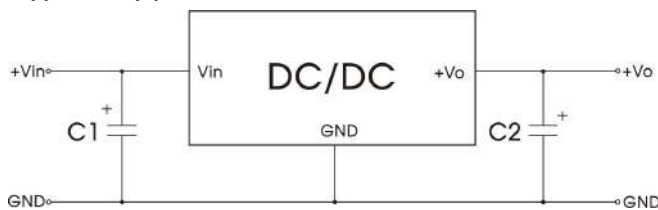


Fig. 2

Notes:

1. 100 μF or 220 μF capacitor (C1) and 22 μF or 47 μF capacitor (C2) are required and should be connected close to the pin terminal, to ensure the stability of the converter.
2. To reduce the output ripple furtherly, increased values and/or tantalum or low ESR polymer capacitors may also be used instead.
3. Refer to Table 1 for C1 and C2 capacitor values.
4. Converter cannot be used for hot swap and with output in parallel.

Table 1

Part No.	C1	C2
SK12T-10A-P(N)	100 $\mu\text{F}/35\text{V}$	22 $\mu\text{F}/16\text{V}$
SK12T-16A-P(N)	220 $\mu\text{F}/35\text{V}$	47 $\mu\text{F}/16\text{V}$

DC/DC Converter

SK12T-10A, 16A Series

2. EMC compliance circuit

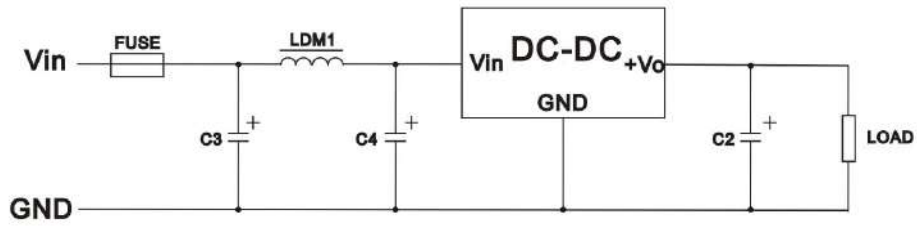


Fig. 3
Table 2

EMI	FUSE	C3/C4	LDM1	C2
CE	Selected based on the actual input current in application	1000 μ F /35V	6.8 μ H	Refer to the Cout in Table 1
RE		100 μ F /35V		

3. Trim Function for Output Voltage Adjustment (open if unused)

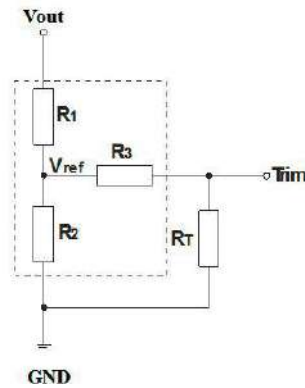


Fig. 4 TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor (R_T) values:

$$R_T (\Omega) = \frac{7200}{V_o - 0.7525} - 1000$$



- Notes: 1. R_T : Resistance of Trim; V_o : The trim up voltage.
2. If $R_T = \infty$ or Trim pin open, $V_o = 0.7525$ VDC.

DC/DC Converter

SK12T-10A, 16A Series

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

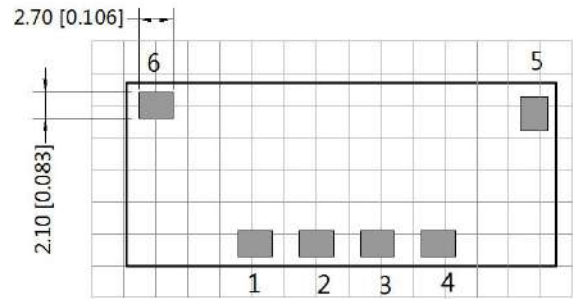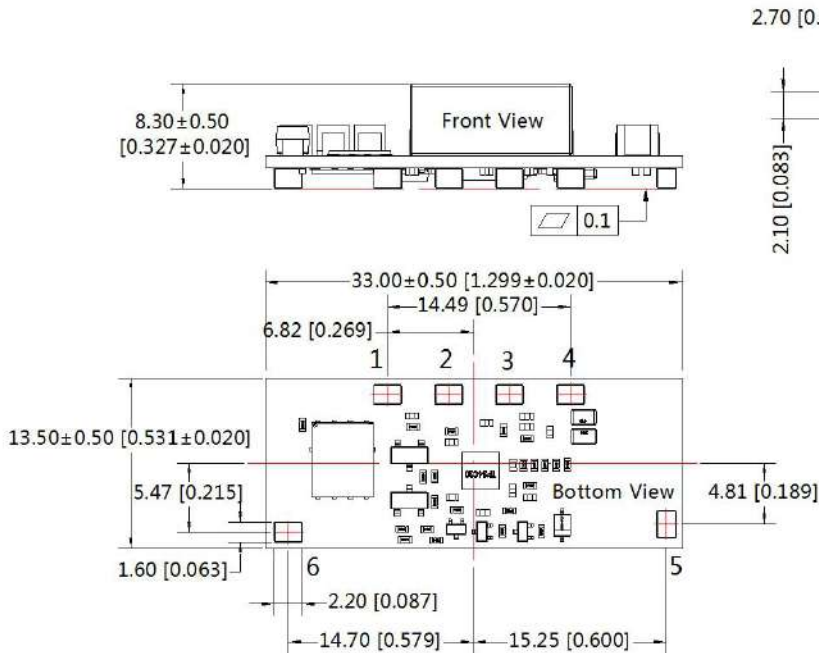

Note : Grid: 2.54*2.54mm

Pin-Out	
Pin	Function
1	GND
2	+Vo
3	Trim
4	Sense
5	Ctrl
6	Vin

Note :
 Unit: mm[inch]
 General tolerances: ± 0.25 [± 0.010]
 The layout of the device is for reference only ,
 please refer to the actual product

Notes:

1. The maximum capacitive load offered were tested at input voltage range and full load;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage, 5VDC output voltage and rated output load;
3. All index testing methods in this datasheet are based on company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.