


Wide input voltage non-isolated and regulated single output

## FEATURES

- High efficiency up to 97%
- No-load input current as low as 2mA
- Operating ambient temperature range: -40°C to +85°C
- Output short-circuit protection



RoHS

SK78(L)xx-3AR3 series are high efficiency switching regulators. The converters feature high efficiency, low loss, short circuit protection, and there is no need for a heat sink. These products are widely used in applications such as industrial control, instrumentation and electric power.

## Selection Guide

Certification	Part No.	Input Voltage (VDC)*	Output		Full Load Efficiency (%) Typ. Vin Min. / Vin Max.	Capacitive Load (μF) Max.
		Nominal (Range)	Voltage (VDC)	Current (mA)		
--	SK78(L)03-3AR3	24 (8-36)	3.3	3000	90/83	1000
	SK78(L)05-3AR3	24 (8-36)	5	3000	93/89	680
	SK78(L)X6-3AR3	24 (10-36)	6.5	3000	94/90	330
	SK78(L)09-3AR3	24 (13-36)	9	3000	95/91	330
	SK78(L)12-3AR3	24 (16-36)	12	3000	97/93	330
	SK78(L)15-3AR3	24 (19-36)	15	3000	97/94	330

Note: \* For input voltages exceeding 30 VDC, an input capacitor of 22μF/50V is required.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
No-load Input Current		--	2	4	mA
Reverse Polarity at Input		Avoid / Not protected			
Input Filter		Capacitance filter			
Ctrl*	Module on	Ctrl pin open or pulled high (TTL 4.5-14VDC)			
	Module off	Ctrl pin pulled low to GND (0-0.8VDC)			
	Input current when off	--	--	4	mA

Note: \* The Ctrl pin voltage is referenced to input GND.

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy	0%-100% load, input voltage range	--	±2	±3	%
Linear Regulation	Full load, input voltage range	--	±0.5	±1	
Load Regulation	Nominal input voltage, 10% -100% load	--	±0.5	±1	

# DC/DC Converter

## SK78(L)xx-3AR3 Series

Ripple & Noise*	20MHz bandwidth, nominal input voltage, 100% load	3.3V/5V/6.5V/9V output	--	40	70	mVp-p
		12V/15V output	--	50	100	
Temperature Coefficient	Operating ambient temperature -40℃ to +85℃		--	--	±0.03	%/℃
Transient Response Deviation	Nominal input voltage, 50% load step change	3.3V output	--	--	5	%Vo
		5V/6.5V output	--	--	4	
		9V/12V output	--	--	3	
		15V output	--	--	2	
Transient Recovery Time	Nominal input voltage, 50% load step change		--	0.1	0.2	ms
Short-circuit Protection	Nominal input voltage		Continuous, self-recovery			
Note: * The "parallel cable" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information;						

## General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	
Pin Soldering Resistance Temperature	Soldering time: 10s	--	--	+260	
Storage Humidity	Non-condensing	5	--	95	%RH
Switching Frequency*	PWM mode	100	250	400	KHz
MTBF	MIL-HDBK-217F@25°C	2000	--	--	K hours
Note: * Different switching frequencies of different output voltages.					

## Mechanical Specifications

Case Material	SK78xx-3AR3 Series	Black plastic; flame-retardant and heat-resistant (UL94 V-0)
	SK78Lxx-3AR3 Series	Open frame
Dimensions	SK78xx-3AR3 Series	32.15 x 14.85 x 9.05 mm
	SK78Lxx-3AR3 Series	30.60 x 12.50 x 5.80mm
Weight	SK78xx-3AR3 Series	9.3g(Typ.)
	SK78Lxx-3AR3 Series	4.0g(Typ.)
Cooling Method	Free air convection	

## Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig. 3 for recommended circuit)	
	RE	CISPR32/EN55032	CLASS B (see Fig. 3 for recommended circuit)	
Immunity	ESD	IEC/EN 61000-4-2	Contact ±6KV	perf. Criteria B
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4	±1KV (see Fig. 3 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN 61000-4-5	line to line ±1KV (see Fig. 3 for recommended circuit)	perf. Criteria B
	CS	IEC/EN 61000-4-6	3Vr.m.s	perf. Criteria A

# DC/DC Converter

## SK78(L)xx-3AR3 Series

### Typical Characteristic Curves

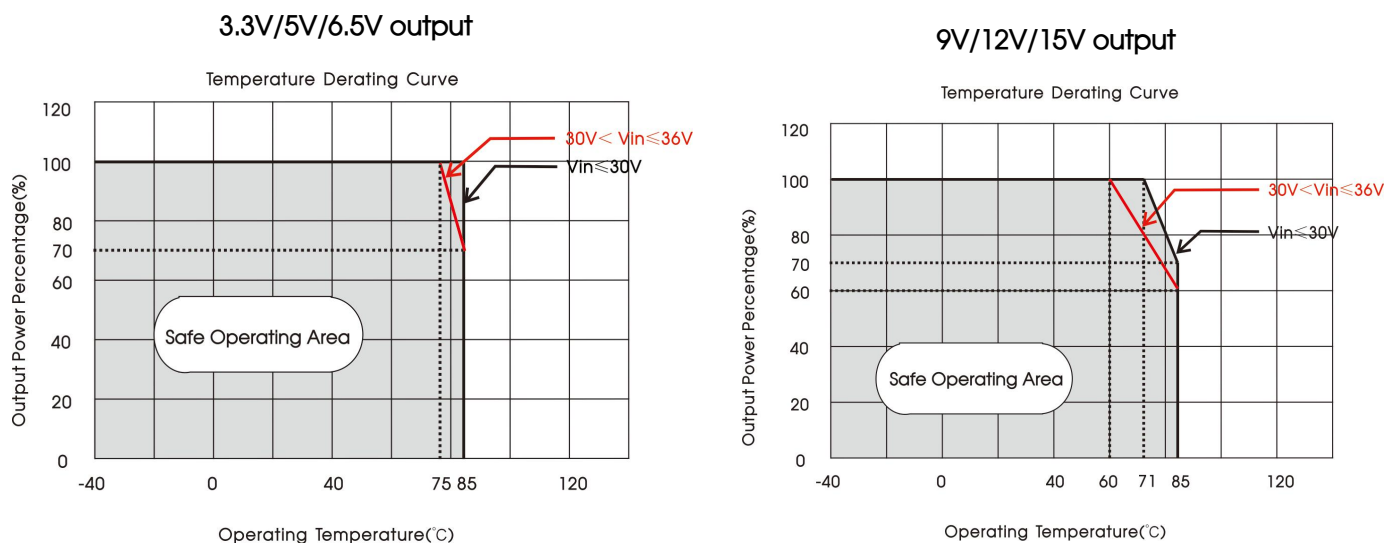


Fig. 1

### Design Reference

#### 1. Typical application


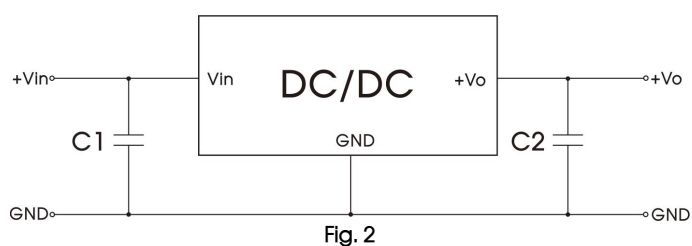


Table 1		
Part No.	C1 (ceramic capacitor)	C2 (ceramic capacitor)
SK78(L)03-3AR3	10μF/50V	22μF/10V
SK78(L)05-3AR3		22μF/10V
SK78(L)X6-3AR3		22μF/10V
SK78(L)09-3AR3		22μF/16V
SK78(L)12-3AR3		22μF/25V
SK78(L)15-3AR3		22μF/25V

#### Notes:

1. The required capacitors C1 and C2 must be connected as close as possible to the terminals of the module;
2. Refer to Table 1 for C1 and C2 capacitor values. For certain applications, increased values and/or tantalum or low ESR electrolytic capacitors may also be used instead;
3. Converter cannot be used for hot swap and with output in parallel

#### 2. EMC compliance circuit

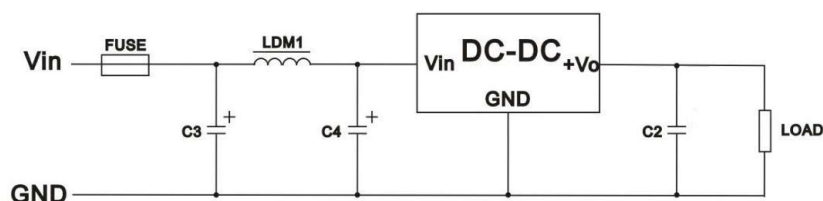

	FUSE	C3	LDM1	C4	C2
Emissions	Select fuse value according to actual input current	100μF /50V	22μH	100μF /50V	Refer to the C2 in Fig. 2
Immunity				680μF /50V	

# DC/DC Converter

## SK78(L)xx-3AR3 Series

### 3. Trim function for output voltage adjustment

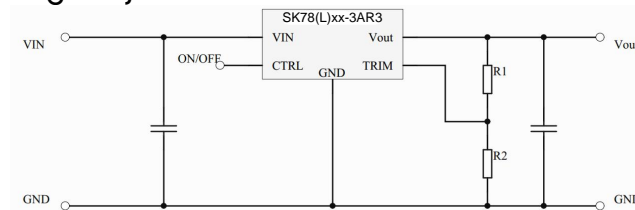


Fig. 4 TRIM resistor connection  
Table 2


Vout nom.	3.3VDC		5.0VDC		6.5VDC		9.0VDC		12VDC		15VDC	
Vout adj.	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2
3	500k											
3.3												
4		95k	195k									
4.5		52k	470k									
5												
5.5				125k	330k							
6				58k	750k							
6.5												
7						140k	220k					
8						40k	520k					
9												
10								65k	530k			
11								28k	1180k			
12												
13									110k	590k		
14									50k	1290k		
15												
16												90k
17												40k

# DC/DC Converter


## SK78(L)xx-3AR3 Series

### Dimensions and Recommended Layout(SK78xx-3AR3 Series)

THIRD ANGLE PROJECTION

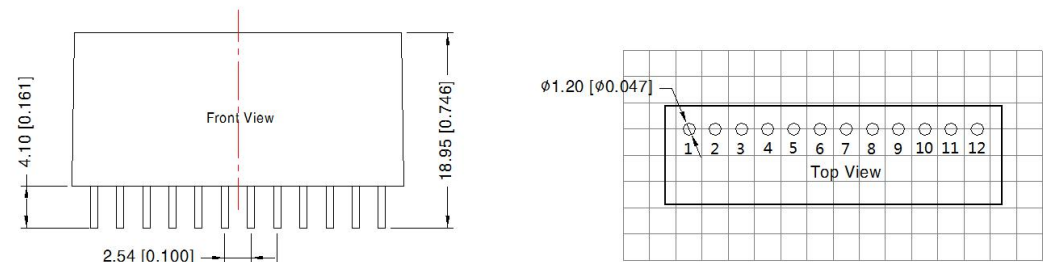

Note: Grid 2.54\*2.54mm

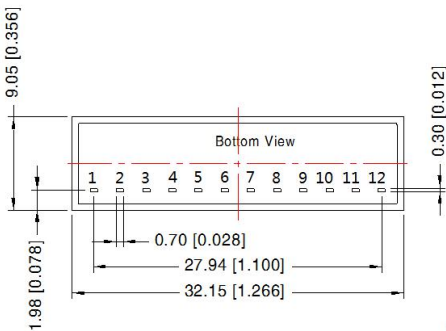

Pin-Out	
Pin	Function
1	Ctrl
2,3,4	Vin
5,6,7,8	GND
9,10	+Vo
11	+Vo
12	Trim



Note:  
Unit: mm[inch]  
Pin diameter tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 0.50[\pm 0.020]$

### Dimensions and Recommended Layout(SK78Lxx-3AR3 Series)

# DC/DC Converter

## SK78(L)xx-3AR3 Series

THIRD ANGLE PROJECTION 

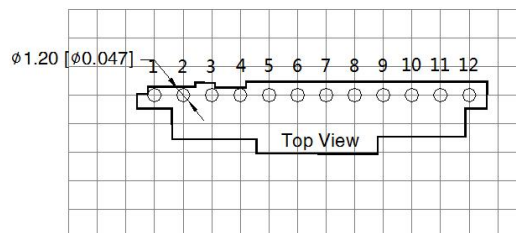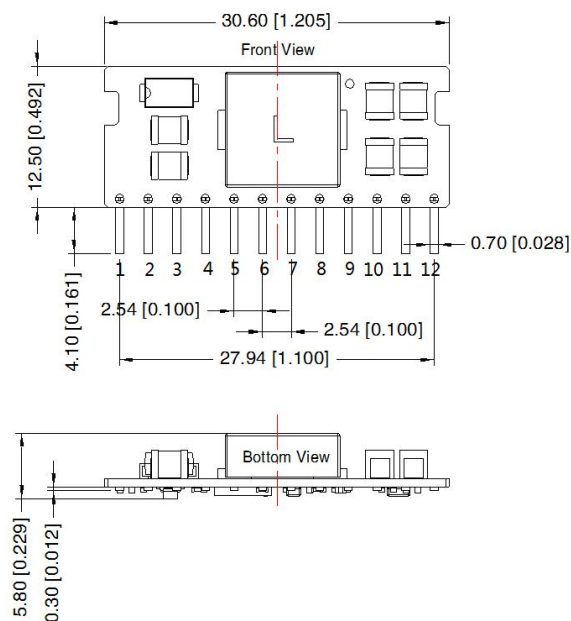

Note: Grid 2.54\*2.54mm

Pin-Out	
Pin	Function
1	Ctrl
2,3,4	Vin
5,6,7,8	GND
9,10	+Vo
11	+Vo
12	Trim

Note:  
Unit: mm[inch]  
Pin diameter tolerances:  $\pm 0.10 [\pm 0.004]$   
General tolerances:  $\pm 0.50 [\pm 0.020]$

### Notes:

- 1.The maximum capacitive load offered were tested at input voltage range and full load;
- 2.Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
- 3.All index testing methods in this datasheet are based on company corporate standards;
- 4.We can provide product customization service, please contact our technicians directly for specific information; Products are related to laws and regulations: see "Features" and "EMC";
- 5.Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.