

Open Frame Power Supply



FEATURES

- Universal 90 - 264VAC or 127 - 373VDC input voltage
- Compact size: 5" x 3" x 1"
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40°C to +70°C
- Built-in active PFC function
- High I/O isolation test voltage up to 4000VAC
- Extremely low leakage current <0.1mA
- Stand-by power consumption <0.5W
- The base plate with conformal coating
- Output short circuit, over-current, over-voltage protection, over-temperature protection
- Installing in system of Safety Class I/II is available
- Suitable for BF application
- IEC/EN/UL62368 approved
- Safety according to IEC/EN/UL62368, IEC/EN60335, IEC/EN61558, GB4943, IEC/EN/ES60601
- Operating altitude up to 5000m



SLOF350-20Bxx series is one of open frame AC-DC switching power supply and suitable for all kinds of BF type (be accessible to patients) medical system equipment. It features universal AC input and at the same time accepts DC input voltage, cost-effective, built-in active PFC function, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN/UL62368, GB4943, IEC/EN60335, IEC/EN61558, IEC/EN/ES60601 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home, medical, etc.

Selection Guide

Certification	Part No.	Cooling method	Output Power* (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.*	Max. Capacitive Load (µF)	
UL/CE	SLOF350-20B12	Air cooling	180	12V/15A	11.4-12.6	92	6000	
		20.5CFM	300	12V/25A				
	SLOF350-20B15	Air cooling	180	15V/12A	14.25-15.75	92	5000	
		20.5CFM	325	15V/21.67A				
	SLOF350-20B24	Air cooling	199.9	24V/8.33A	22.8-25.2	93	3200	
		20.5CFM	350.4	24V/14.6A				
	SLOF350-20B27	Air cooling	199.8	27V/7.4A	25.65-28.35	93	2600	
		20.5CFM	351	27V/13A				
	SLOF350-20B48	Air cooling	200.1	48V/4.17A	45.6-50.4	94	2000	
		20.5CFM	350.4	48V/7.3A				
	UL	SLOF350-20B36	Air cooling	200.16	36V/5.56A	34.2-37.8	93	2000
			20.5CFM	350.28	36V/9.73A			
CE (Pending)	SLOF350-20B54	Air cooling	199.8	54V/3.7A	51.3-56.7	94	2000	
		20.5CFM	351	54V/6.5A				

Notes: 1.*Under any conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current;
2.*When measuring the full load efficiency, the fan should be connected to an external power supply. Fan loss is not included in the input power;
3. *SLOF Products with shell is also available, named SLOF350-20Bxx-C.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC Input	90	--	264	VAC

AC/DC Converter

SLOF350-20Bxx Series

	DC input	127	--	373	VDC
Input Voltage Frequency		47	--	63	Hz
Input Current	115VAC	--	--	4	A
	230VAC	--	--	2	
Inrush Current	115VAC	Cold start	--	50	--
	230VAC		--	75	
Power Factor	115VAC	Full load	0.98	--	--
	230VAC		0.95	--	
Leakage Current	240VAC	<0.1mA; Single fault <0.5mA			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy*	Full load range	12V/15V	--	±3	--	%
		24V/27V/36V/48V/54V	--	±2	--	
Line Regulation	Rated load		--	±0.5	--	%
Load Regulation	0% - 100% load		--	±1	--	
Output Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	12V/15V	--	--	120	mV
		24V	--	--	150	
		27V/36V	--	--	200	
		48V/54V	--	--	250	
Temperature Coefficient			--	±0.03	--	%/°C
Minimum Load			0	--	--	%
Hold-up Time	230VAC, full load	Air cooling	12	14	--	ms
		20.5CFM	6	8	--	
Stand-by Power Consumption	230VAC		--	--	0.5	W
Short Circuit Protection	recover time <5s after the short circuit disappear		Constant current, continuous, self-recover			
Over-current Protection			≥110%, self-recover			
Over-voltage Protection	12V		≤15.0V (Output voltage turn off, re-power on for recover)			
	15V		≤18.5V (Output voltage turn off, re-power on for recover)			
	24V		≤30.0V (Output voltage turn off, re-power on for recover)			
	27V		≤33.5V (Output voltage turn off, re-power on for recover)			
	36V		≤45.0V (Output voltage turn off, re-power on for recover)			
	48V		≤59.5V (Output voltage turn off, re-power on for recover)			
	54V		≤63.0V (Output voltage turn off, re-power on for recover)			
Over-temperature Protection*			Output voltage turn off, re-power on for recover after the temperature drops.			
Fan power	12V/15V/24V/36V/48V/54V		Offer output power of 12V/0.5A with output voltage accuracy ±15%			
	27V		Offer output power of 12V/0.5A with output voltage accuracy -25% - +15%			

Notes: 1. * Output Voltage Accuracy: including setting error, line regulation, load regulation;

2.* The "Tip and barrel method" is used for ripple and noise test, output parallel 10uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information;

3. * When the product works under light load (≤10%Io), in order to improve efficiency, the value of ripple & noise will be 1.5 times of the full load specification;

4.* For all the above test items, please refer to our company standard "AC-DC Black Box Test Specification" for specific test specifications and methods;

5.* For fan power connection method, please refer to pin 6/7 of the dimension drawing.

AC/DC Converter

SLOF350-20Bxx Series

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Test	Input - ⊕	Electric Strength Test for 1min., leakage current <10mA	2000	--	--	VAC
	Input - output		4000	--	--	
	Output - ⊕		1500	--	--	
Insulation Resistance	Input - ⊕	Environment temperature: 25±5℃,	100	--	--	MΩ
	Input - output	Relative humidity: <95%RH, non-condensing	100	--	--	
	Output - ⊕	Testing voltage: 500VDC	100	--	--	
Isolation level	Input - output		2 x MOPP			
	Input - ⊕		1 x MOPP			
	Output - ⊕		1 x MOPP			
Operating Temperature		-40	--	+70	℃	
Storage Temperature		-40	--	+85		
Storage Humidity	Non-condensing		10	--	95	%RH
Operating Humidity			20	--	90	
Power Derating	Operating temperature derating	+50℃ to +70℃	2.5	--	--	% / ℃
		-40℃ to +50℃	0	--	--	
	Input voltage derating	90VAC - 100VAC	1.00	--	--	% / VAC
		100VAC - 264VAC	0	--	--	
Safety Standard		Meet IEC/EN/UL62368-1/EN60335-1/IEC/EN61558-1/GB4943-1/IEC/EN60601-1/ES60601-1(3.1 version)/CAN/CSA-C22.2 No.60601-1:14-Edition 3/EN60601-1-2 Edition 4				
Safety Certification	12V/15V/24V/27V/48V		IEC/EN/UL62368(Approved)/EN60601(Pending)			
	36V		ES60601(Pending)			
	54V		EN62368(Pending)			
Safety Class		CLASS I (with PE)/CLASS II (without PE)				
MTBF	MIL-HDBK-217F@25℃		≥300,000 h			

Mechanical Specifications

Case Material	Open frame
Dimensions	127 x 76.2 x 25.4mm
Weight	295g (Typ.)
Cooling Method*	Air cooling (180W/200W) / 20.5CFM (300W/350W)
Notes: *Please refer to the product characteristic curve for cooling method and power derating.	

Electromagnetic Compatibility (EMC)*

EMI*	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B (Category I, CLASS B; Category II, CLASS A)	
	Harmonic Current	IEC/EN61000-3-2	CLASS A	
	Flicker	IEC/EN61000-3-3		
EMS*	ESD	IEC/EN 61000-4-2	Contact ±8KV/Air ±15KV	perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4	±4KV	perf. Criteria A
	Surge	IEC/EN 61000-4-5	±2KV/±4KV	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	DIP	IEC/EN61000-4-11	0%, 70%	perf. Criteria B

Notes: 1.*The power supply is considered a component as part of system, all EMC items are tested on a metal plate (L x W x H, 360mm x 360mm x 1mm). Power supply should be combined with final equipment for EMC confirmation;


2.*Category I products with PE, category II products without PE.

AC/DC Converter


SLOF350-20Bxx Series

Product Characteristic Curve


SLOF350-20B12 (full load 300W with 20.5CFM)

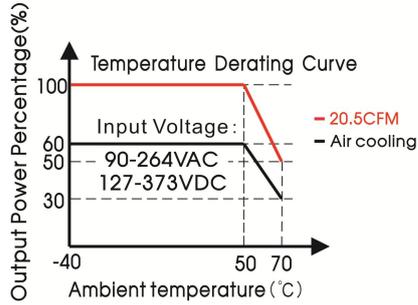


SLOF350-20B15 (full load 325W with 20.5CFM)

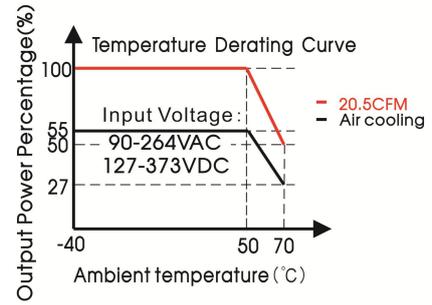



SLOF350-20B24/27/36/48/54 (full load 350W with 20.5CFM)

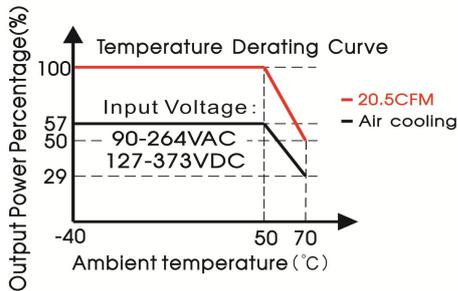


SLOF350-20Bxx Input Voltage Derating Curve

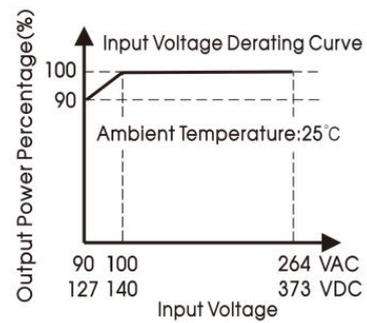

Note: With an AC input voltage between 90 - 100VAC and a DC input between 127 - 140VDC the output power must be derated as per the temperature derating curves.

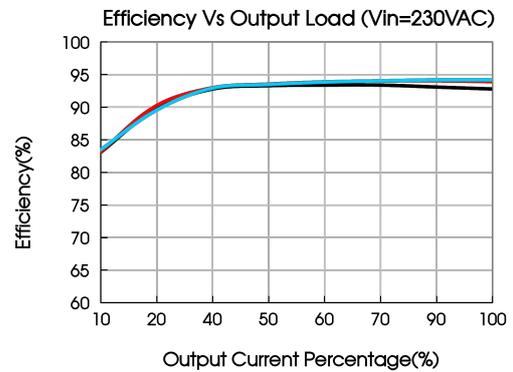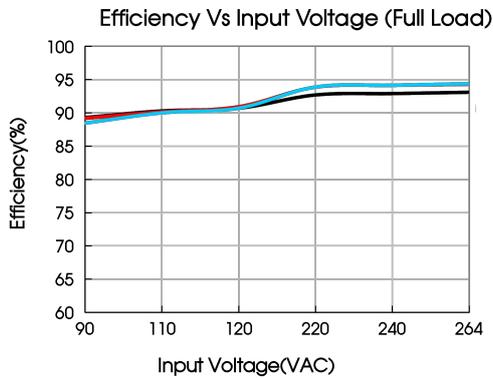


Dimensions and Recommended Layout

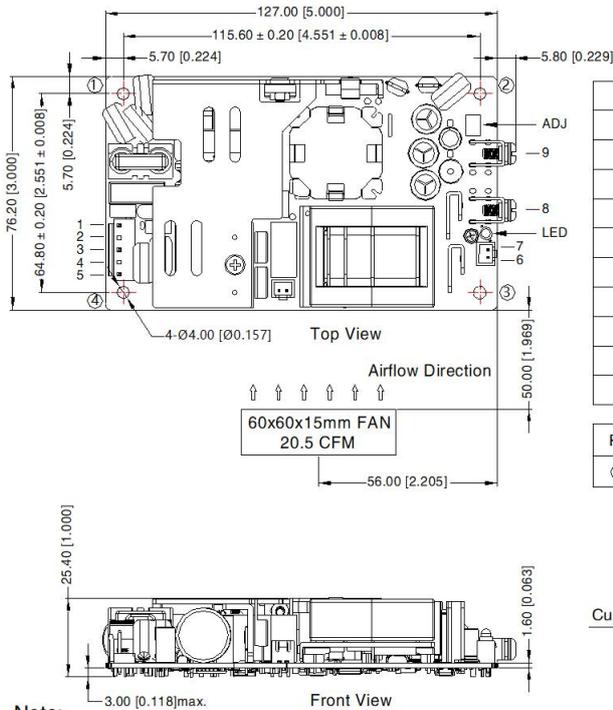

Pin-Out			
Pin	Function	Product Connector	Customer Connector
1	AC(N)	JST B5P-VH or equivalent	Housing: JST VHR Contact: JST SVH-21T-P1.1 or equivalent
2	NC		
3	AC(L)		
4	NC		
5	⊕	KANGDAO 2.5XHS-2A or equivalent	Housing: KANGDAO 2.5XHS-2Y Contact: KANGDAO 2.5XH-TE or equivalent
6	FAN-		
7	FAN+		
8	-Vo		
9	+Vo		

Position	Screw Spec.	L(Recommend)	Torque(max)
① - ④	M3	6mm	0.4N·m

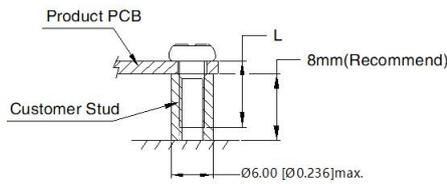

Note:

- Unit: mm[inch]
- General tolerances: $\pm 1.00 [\pm 0.039]$
- Connector tightening torque: M3.5, 0.8N·m
- Wire range: 18-14AWG
- The layout of the device is for reference only, please refer to the actual product
- Reserved safety distance between PCB edge and customer components, recommended 10mm
- Class I system ①, ②, ④ positions must be connected to the earth (⊕)
- Class II system ①, ②, ④ positions must be connected together

Note:

- For additional information on Product Packaging please refer to www.schmid-m.com Packaging bag number: 58220142;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- The ambient temperature derating of $5^\circ\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at light load, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE (⊕) of system when the terminal equipment in operating;
- Warning: Use double fuses, please disconnect the power before maintenance and replacement;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a final equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.