


3W, AC/DC converter

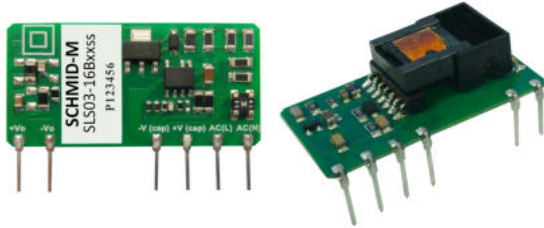

FEATURES

- Ultra-wide 90 - 528VAC and 100 - 745VDC input voltage range
- Accepts AC and/or DC input (dual-use of same terminal)
- Operating ambient temperature range -40°C to +85°C
- High I/O isolation test voltage of up to 4000VAC
- Compact size and high power density
- Used in such as electrical, instrumentation industries
- Output short circuit, over-current protection
- Meets UL60950, EN62368 and FCC part 15 standards

SLS03-16BxxSS (-F) series is a compact size SCHMID-M power converter. It features ultra-wide input voltage, accepting both DC and AC input voltage, low power consumption, high efficiency, high reliability and Class II reinforced insulation. The products meet UL60950, EN62368, FCC part 15 safety standards and are widely used in industrial control instrumentation and such as electric power for demanding volume applications with the requirement for wide input voltage ranges, the need to meet UL/CE safety certifications and lower demand for EMC compliance levels. We recommend using external components as shown in design reference for enhanced EMC performance in harsh environmental conditions.

Selection Guide

Certification	Part No.	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
UL/CE/CB	SLS03-16B03SS(-F)*	1.65W	3.3V/500mA	63	2200
	SLS03-16B05SS(-F)	2.5W	5V/500mA	67	1100
	SLS03-16B09SS(-F)	3W	9V/333mA	70	680
	SLS03-16B12SS(-F)		12V/250mA	76	680
	SLS03-16B15SS(-F)		15V/200mA	76	560
	SLS03-16B24SS(-F)		24V/125mA	76	470

Note: *An "-F" suffix designates horizontal package vs. standard vertical mounting.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	90	--	528	VAC
	DC input	100	--	745	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	0.12	A
	230VAC	--	--	0.06	
	480 VAC	--	--	0.04	
Inrush Current	115VAC	--	9	--	A
	230VAC	--	15	--	
	480 VAC	--	27	--	
Leakage Current		0.25mA RMS typ. 230VAC/50Hz			
Recommended External Input Fuse		2.0A, slow-blow, required			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	SLS03-16B03SS(-F)	--	±6	--	%
	Others	--	±5	--	
Line Regulation	Full load	SLS03-16B03SS(-F)	--	±2.5	%
		Others	--	±1.5	
Load Regulation	10% - 100% load	--	±2.5	--	

AC/DC Converter

SLS03-16BxxSS (-F) Series

Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	--	180	mV
Temperature Coefficient		--	±0.15	--	%/°C
Stand-by Power Consumption	230VAC Input	--	--	0.3	W
	528VAC Input	--	--	0.5	
Short Circuit Protection		Hiccup, continuous, self-recovery			
Over-current Protection		150 - 300%Io, self-recovery			
Minimum Load		10	--	--	%
Hold-up Time	230VAC input	--	40	--	ms

Note: * The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Test	Input-output Electric Strength Test for 1min.	4000	--	--	VAC
Operating Temperature	Work in the power drop curve range	-40	--	+85	°C
Storage Temperature		-40	--	+105	
Storage Humidity		--	--	85	%RH
Soldering Temperature	Wave-soldering	260 ± 5°C; time: 5 - 10s			
	Manual-welding	360 ± 10°C; time: 3 - 5s			
Switching Frequency		--	70	--	kHz
Power Derating	+55°C to +85°C	2.0	--	--	% / °C
	-40°C to -20°C	3.0	--	--	
Safety Standard		IEC62368/EN62368/UL60950			
Safety Certification		IEC62368/EN62368/UL60950			
Safety Class		CLASS II			
MTBF		MIL-HDBK-217F@25°C ≥ 300,000 h			

Mechanical Specifications

Dimension	44.50 x 13.00 x 24.00 mm
Weight	8g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)


Emissions*	CE	CISPR32/EN55032 FCC part 15 CLASS A (See Fig. 1 for typical application circuit)			
		CISPR32/EN55032 FCC part 15 CLASS B (See Fig. 2 for recommended circuit)			
	RE	CISPR32/EN55032 FCC part 15 CLASS A (See Fig. 1 for typical application circuit)			
		CISPR32/EN55032 FCC part 15 CLASS B (See Fig. 2 for recommended circuit)			
Immunity	ESD	IEC/EN 61000-4-2	Contact ±4KV	Perf. Criteria B	
	RS	IEC/EN61000-4-3	10V/m (See Fig. 2 for recommended circuit)	perf. Criteria A	
	EFT	IEC/EN 61000-4-4 ±2KV (See Fig. 1 for typical application circuit)		perf. Criteria B	
		IEC/EN 61000-4-4 ±4KV (See Fig. 2 for recommended circuit)		perf. Criteria B	
	Surge	IEC/EN 61000-4-5 line to line ±1KV (See Fig. 1 for typical application circuit)		perf. Criteria B	
		IEC/EN 61000-4-5 line to line ±2KV/ line to ground ±4KV (See Fig. 2 for recommended circuit)		perf. Criteria B	
	CS	IEC/EN61000-4-6	3Vr.m.s (See Fig. 2 for recommended circuit)	perf. Criteria A	
Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70% (See Fig. 2 for recommended circuit)	perf. Criteria B		

*This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

AC/DC Converter

SLS03-16BxxSS (-F) Series

Product Characteristic Curve

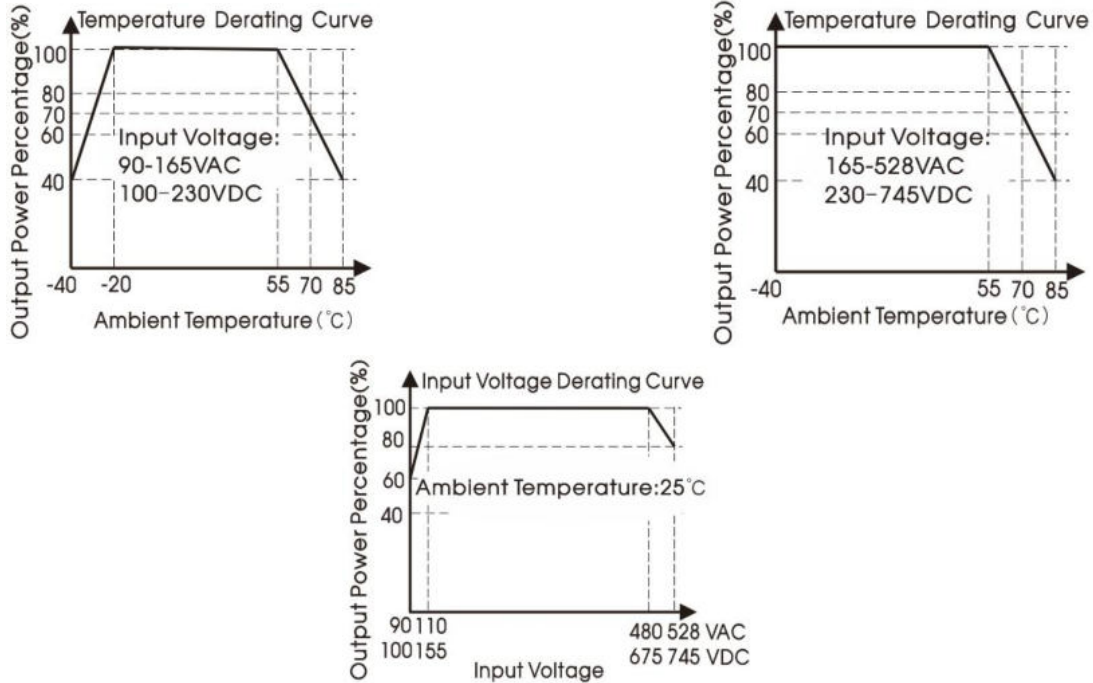

- Note:
- ① With an AC input between 90 - 110VAC / 480 - 528VAC and a DC input between 100 - 155VDC/675-745VDC, the output power must be derated as per temperature derating curves;
 - ② Please refer to typical application for operating the product at full load with an ambient temperature at -40°C to -20°C;
 - ③ This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

Design Reference

1. Typical application

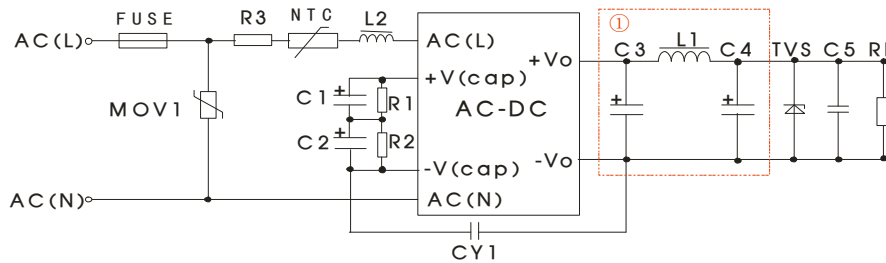


Fig. 1: Typical circuit diagram

Note: ① is a Pi filter circuit

Part No.	MOV1	C1/C2 (required)	L2	R1/R2 (required)	C3 (required)	L1 (required)	C4 (required)	C5	CY1	FUSE (required)	NTC (required)	R3 (required)	TVS
SLS03-16B03SS(-F)	S14K550	22uF/450V	1.2mH	3M Ω	270uF/16V (Solid Capacitor)	4.7uH	100uF/35V	0.1uF/50V	470pF/500VAC	2.0A	5D-9	7.5 Ω /2W	SMBJ7.0A
SLS03-16B05SS(-F)													SMBJ7.0A
SLS03-16B09SS(-F)													SMBJ12A
SLS03-16B12SS(-F)													SMBJ20A
SLS03-16B15SS(-F)													SMBJ20A
SLS03-16B24SS(-F)													SMBJ30A

- Note:
1. For best results we recommended using identical electrolytic filter capacitors for C1 and C2 (brand, model, batch, etc.);
 2. R1/R2: The maximum operation voltage of R1 and R2 should be above 450V. We recommend using several chip resistors in series to meet this type of operation voltage;
 3. R3 refers to the winding resistance;
 4. Output filter: We recommend using an electrolytic capacitor with high frequency, high ripple current and low ESR rating for C3 and C4 (refer to manufacture's datasheet). Combined with L1, they form a pi-type filter circuit. Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. The same type of margins should be chosen for L1 and L2 current ratings. C5 is a ceramic capacitor, used to filtering high frequency noise. A suppressor diode (TVS) is a recommended to protect the application in case of a converter failure.
 5. For full load operation at an ambient temperature of -40°C to -20°C, we recommend using following parameter changes to component values: 33uF/450V for C1/C2, 1 M Ω for R1/R2, 12 Ω /2W for R3 and 10D-10 for the NTC.

AC/DC Converter

SLS03-16BxxSS (-F) Series

2. EMC compliance recommended circuit


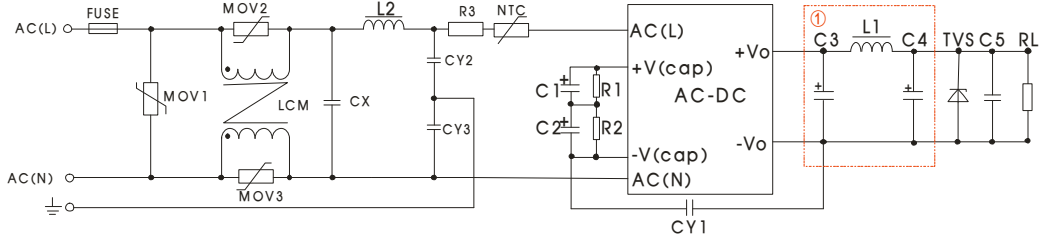


Fig. 2 : EMC application circuit

Component	Recommended value
MOV1	S14K550
MOV2, MOV3	S07K300
CY2, CY3	470pF/500VAC
CX	0.1uF/530VAC
LCM	4.5mH
L2	1.2mH
NTC	10D-10
R3	12Ω/2W
FUSE	2.0A, slow-blow, required

Note: The recommended values of other components are shown in typical application.

SLS03-16BxxSS Dimensions and Recommended Layout

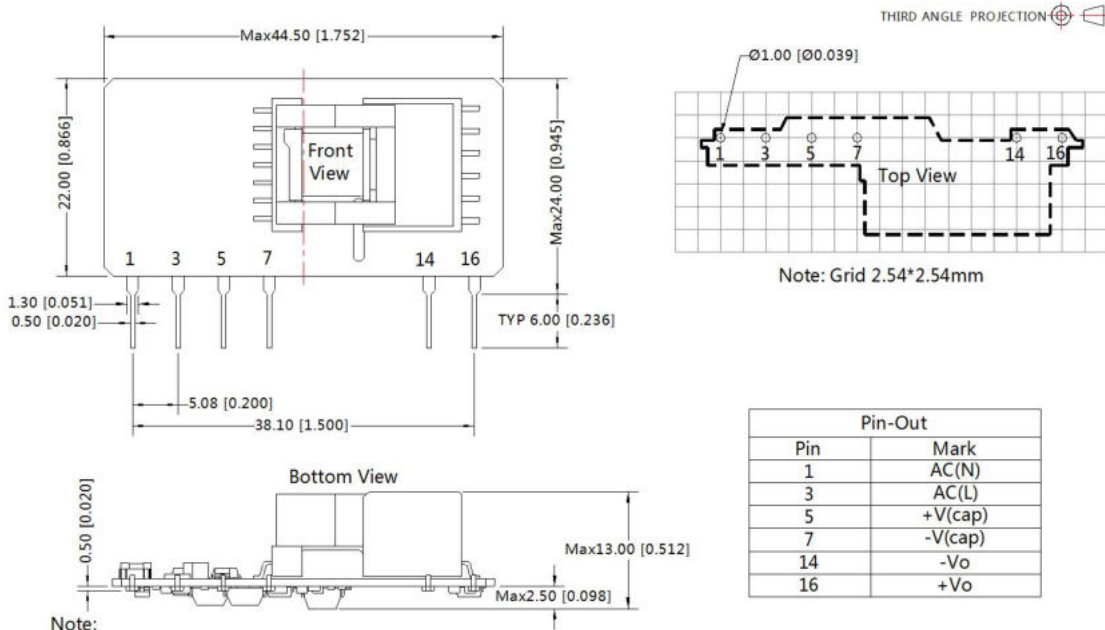

Note:
 Unit: mm[inch]
 Pin section tolerances: $\pm 0.10[\pm 0.004]$
 General tolerances: $\pm 0.50[\pm 0.020]$
 The layout of the device is for reference only, please refer to the actual product


1. It is necessary to add C1/C2 and R1/R2 between pin5 and pin 7.
2. It is necessary to add pi-type filter circuit to the output, such as the typical application of Figure 1.

AC/DC Converter

SLS03-16BxxSS (-F) Series

SLS03-16BxxSS-F Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

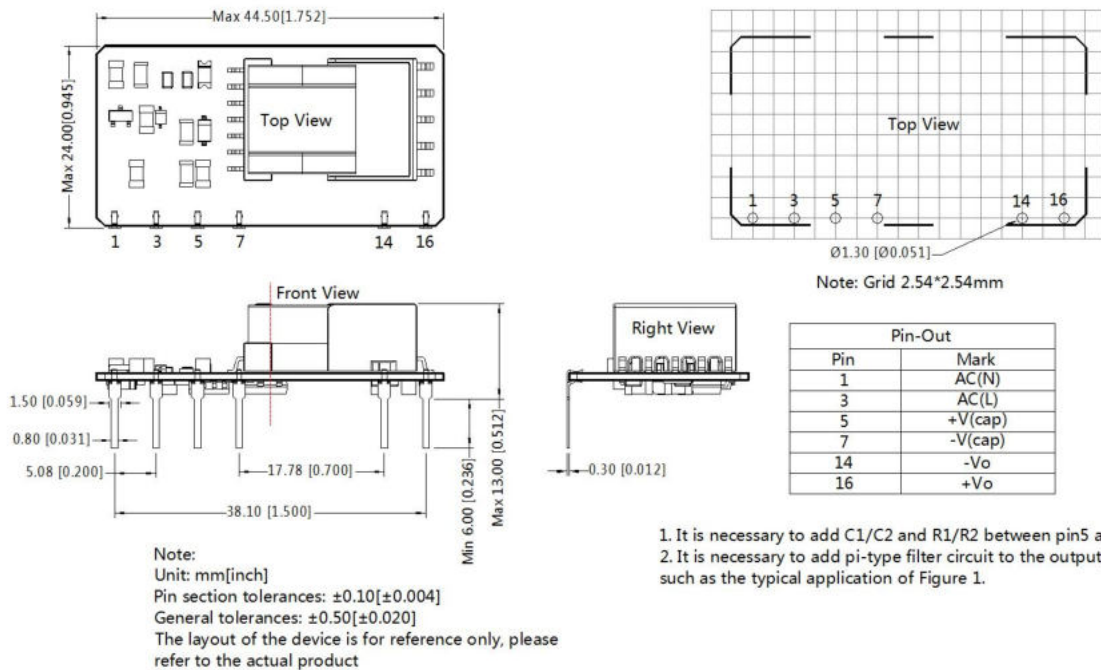

Notes:

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. This part is open frame, at least 10mm safety distance between the primary and secondary external components of the module is needed to meet the safety requirement;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%, typical application circuit with nominal input voltage and rated output load;
4. In order to improve the efficiency at light load, there will be audible noise generated, but it does not affect product performance and reliability;
5. The module needs to be glued and fixed after assembly;
6. All index testing methods in this datasheet are based on our company corporate standards;
7. We can provide product customization service, please contact our technicians directly for specific information;
8. Specifications are subject to change without prior notice;
9. Products are related to laws and regulations: see "Features" and "EMC";
10. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.