



RoHS

FEATURES

- Universal 90 - 264VAC or 127 - 370VDC input voltage
- Compact size 5" x 3"
- Operating ambient temperature range: -40°C to +70°C
- Built-in active PFC function
- Output short circuit, over-current, over-voltage protection, over-temperature protection
- 320W with air cooling, 550W with 25CFM
- 5VDC standby output, 12VDC fan supply, power good, power fail and remote sense
- Suitable for BF application
- Safety according to IEC/EN/UL62368, IEC/EN61558, GB4943, IEC/EN/ES60601-1(3th Edition), medical safety certification (2 x MOPP), IEC60601-1-2: 2014 (4th Edition)
- Operating altitude up to 5000m

SLOF550-20Bxx series is one of SCHMID-M's AC-DC miniaturize open frame power supply and suitable for all kinds of BF type (be accessible to patients) medical system equipment. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN/UL62368, GB4943, IEC/EN60335, IEC/EN61558, IEC/EN/ES60601-1 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home, etc.

Selection Guide

Certification	Part No.*	Cooling method	Output Power *	Nominal Output Voltage and Current(Vo/Io)	Output Voltage Adjustable RangeADJ (V)	Efficiency at 230VAC (%) Typ. *	Capacitive Load (μF) Max.
UL (Pending)	SLOF550-20B12	Air cooling	320.4	12V/26.7	11.4 -12.6	91	6000
		25CFM	499.2	12V/41.6			
	SLOF550-20B15	Air cooling	319.5	15V/21.3	14.25 -15.75	92	6000
		25CFM	499.5	15V/33.3			
	SLOF550-20B24	Air cooling	321.6	24V/13.4	22.8 -25.2	93	6000
		25CFM	549.6	24V/22.9			
	SLOF550-20B27	Air cooling	321.3	27V/11.9	25.65 - 28.35	93.5	4000
		25CFM	550.8	27V/20.4			
	SLOF550-20B36	Air cooling	320.4	36V/8.9	34.2 - 37.8	94	3000
		25CFM	550.8	36V/15.3			
	SLOF550-20B48	Air cooling	321.6	48V/6.7	45.6 - 50.4	94	2000
		25CFM	550	48V/11.46			

Notes: 1.*Under any conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current;
2.*When measuring the full load efficiency, the fan should be connected to an external power supply. Fan loss is not included in the input power;
3.*SLOF Products with shell is also available, named SLOF550-20Bxx-C/CF.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		90	--	264	VAC
	DC input		127	--	370	VDC
Input Frequency			47	--	63	Hz
Input Current	90V/115VAC		--	--	6.5	A
	230VAC		--	--	3.0	
Inrush Current	115VAC	Cold start	--	50	--	

AC/DC 550W Open Frame Power Supply

SLOF550-20Bxx Series

	230VAC		--	80	--	
Power Factor	115VAC	Full load	0.98	--	--	--
	230VAC		0.95	--	--	--
Leakage Current	264VAC	Contact leakage current	<0.1mA			
		Earth leakage current	<0.5mA			
Hot Plug			Unavailable			

Output Specifications*

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy*	Full load	12V/15V/24V/27V	--	±2	--	%
		36V/48V	--	±1	--	
Line Regulation	Rated load		--	±0.5	--	
Load Regulation	0%-100% load		--	±1	--	
Ripple & Noise*	20MHz bandwidth		--	--	200	mV
Temperature Coefficient			--	±0.03	--	%/℃
Minimum Load			0	--	--	%
Hold-up Time	115VAC input		10	--	--	ms
	230VAC input		10	--	--	
Stand-by Power Consumption	Room temperature, 230VAC input, (PS-ON Low potential)		--	--	0.5	W
Short Circuit Protection	Recover time <5s after the short circuit disappear		Hiccup, continuous, self-recover			
Over-current Protection			≥105%Io, Hiccup, self-recover			
Over-voltage Protection*	12V		≤15.6VDC(Output voltage turn off, re-power on for recover)			
	15V		≤19.5VDC(Output voltage turn off, re-power on for recover)			
	24V		≤31.2VDC(Output voltage turn off, re-power on for recover)			
	27V		≤35.1VDC(Output voltage turn off, re-power on for recover)			
	36V		≤46.8VDC(Output voltage turn off, re-power on for recover)			
	48V		≤60.0VDC(Output voltage turn off, re-power on for recover)			
Over-temperature Protection*			Protection when over-temperature, recover automatically after the temperature drops.			
Fan Power*	12V/15V/24V/27V/36V/48V		Offer output power of 12V/0.5A			
PS_ON Input Signal*	Power on	PS_ON High	2	--	5	V
	Power off	PS_ON Low	0	--	0.5	
PG Signal*	Power on	The PG signal goes high with 10ms to 500ms delay after	10	--	500	ms
	Power off/Power fail	The TTL signal goes low at least 1ms before output	1	--	--	
	High level	High	2	--	6	V
	Low level	Low	0	--	0.6	
Remote Sense*	When RS+ and RS- are connected to the system, with function of remote voltage compensation, if not needed, left RS+ and RS open					
5V Standby*	5Vsb: The load capacity is 0.6A without fan, the load capacity is 1A with fan 25CFM; tolerance 2%, ripple: 120mVp-p(max.)					

Note: 1.*Output Voltage Accuracy : including setting error, line regulation, load regulation;

2.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor (Low ESR) and 0.1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information;

3.*Over-temperature Protection: use the discharge pen to release the input electrolytic charge completely, and then test the restart auto recover.

4.*For all the above test items, please refer to our company standard "AC-DC Black Box Test Specification" for specific test specifications and methods;

5.*For fan power connection method, please refer to 5, 6 in the external dimension drawing;

6.*For PS_ON, 5V standby connection method, please refer to CN6 in the external dimension drawing;

7.*For PG standby connection method, please refer to CN2 in the external dimension drawing;

AC/DC 550W Open Frame Power Supply

SLOF550-20Bxx Series

General Specifications

Item		Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Test	Input-output	Electric Strength Test for 1min. Leakage current <5mA		4000	--	--	VAC
	Input - ⊕			2000	--	--	
	output - ⊕			1500	--	--	
Insulation Resistance	Input-output	Environment temperature: 25 ± 5℃, Relative humidity: <95%RH, non-condensing Testing voltage: 500VDC		100	--	--	M Ω
	Input - ⊕			100	--	--	
	output - ⊕			100	--	--	
Isolation level	Input-output			2 x MOPP			
	Input - ⊕			1 x MOPP			
	output - ⊕			1 x MOPP			
Operating Temperature				-40	--	+70	℃
Storage Temperature				-40	--	+85	
Storage Humidity		Non-condensing		10	--	95	%RH
Operating Humidity				20	--	90	
Switching Frequency				--	--	--	KHz
Power Derating	25CFM	Operating Temperature derating	-40℃ to +50℃	0	--	--	% /℃
			+50℃ to +70℃	2.5	--	--	
	Air cooling	230V/ 320W	+45℃ to +50℃	4.0	--	--	W /℃
			+50℃ to +60℃	6.0	--	--	
		115V/310W	+30℃ to +40℃	1.0	--	--	
			+40℃ to +50℃	6.0	--	--	
			+50℃ to +60℃	4.0	--	--	
	Input voltage derating	90VAC -115VAC		1.0	--	--	% /VAC
		115VAC - 264VAC		0	--	--	
		127VDC -160VDC		0.76	--	--	% /VDC
		160VDC - 370VDC		0	--	--	
Safety Standard				IEC/EN/UL62368/EN60335/GB4943			
Safety Certification				IEC/EN/UL/CB62368/EN60601 (Pending)			
Safety Class				CLASS I			
MTBF		MIL-HDBK-217F@25℃		>200,000 h			

Mechanical Specifications

Case Material	Open Frame			
Dimension	127×76.2×40.5mm	12V/15V	127×76.2×38.5mm	24V/27V/36V/48V
Weight	490g (Typ.)	12V/15V	470g (Typ.)	24V/27V/36V/48V
Cooling Method*	310W/320W Air cooling; 500W/550W 25CFM			
Notes: *Please refer to the product characteristic curve for cooling method and power derating.				

Electromagnetic Compatibility (EMC)*

Emissions	CE	EN55032(CISPR32)/EN55011(CISPR11) CLASS B		
	RE	EN55032(CISPR32)/EN55011(CISPR11) CLASS B		
	Harmonic Current	IEC/EN61000-3-2 CLASS A and CLASS D		
	Flicker	IEC/EN61000-3-3		
Immunity	ESD	IEC/EN61000-4-2	Contact ±8KV/Air ±15KV	Perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV	perf. Criteria A




AC/DC 550W Open Frame Power Supply

SLOF550-20Bxx Series



Surge	IEC/EN61000-4-5	line to line $\pm 2\text{KV}$, line to ground $\pm 4\text{KV}$	perf. Criteria A
CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
DIP IEC/EN61000-4-11 0%, 70%	DIP IEC/EN61000-4-11	0%, 70%	Perf. Criteria A

Notes: 1.*The power supply is considered a component as part of system, all EMC items are tested on a metal plate (L x W x H, 360mm x 360mm x 1mm). Power supply should be combined with final equipment for EMC confirmation.

Product Characteristic Curve

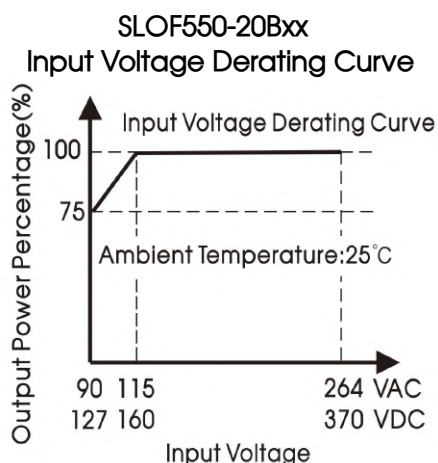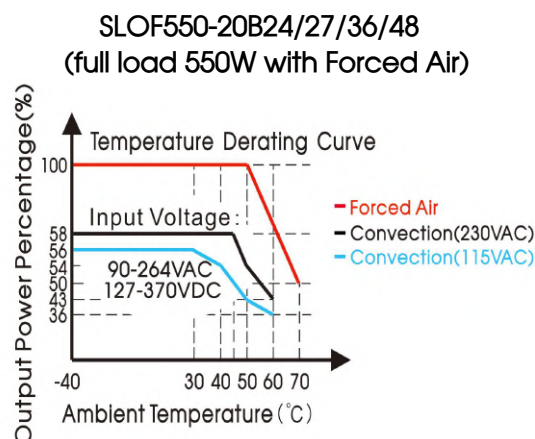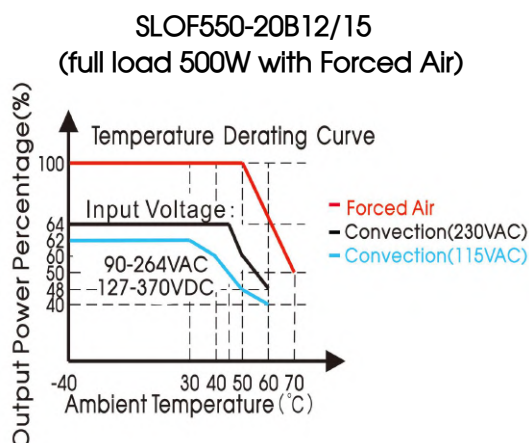

Note: With an AC input voltage between 90 - 115VAC and a DC input between 127 - 160VDC the output power must be derated as per the temperature derating curves

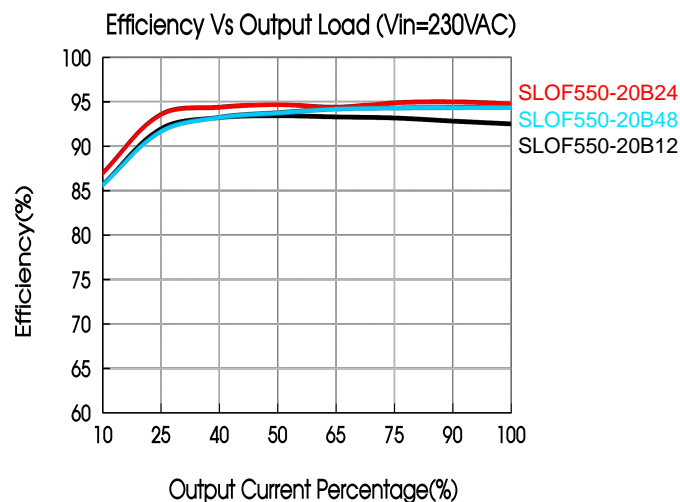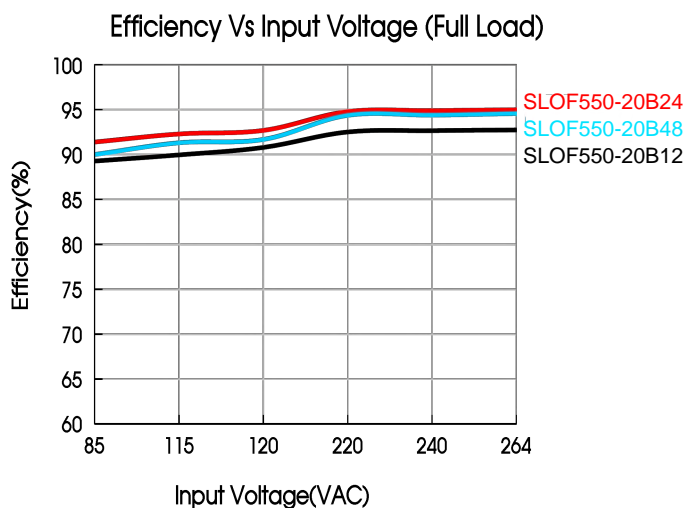


AC/DC 550W Open Frame Power Supply

SLOF550-20Bxx Series

Dimensions and Recommended Layout

SLOF550-20Bxx Series

THIRD ANGLE PROJECTION

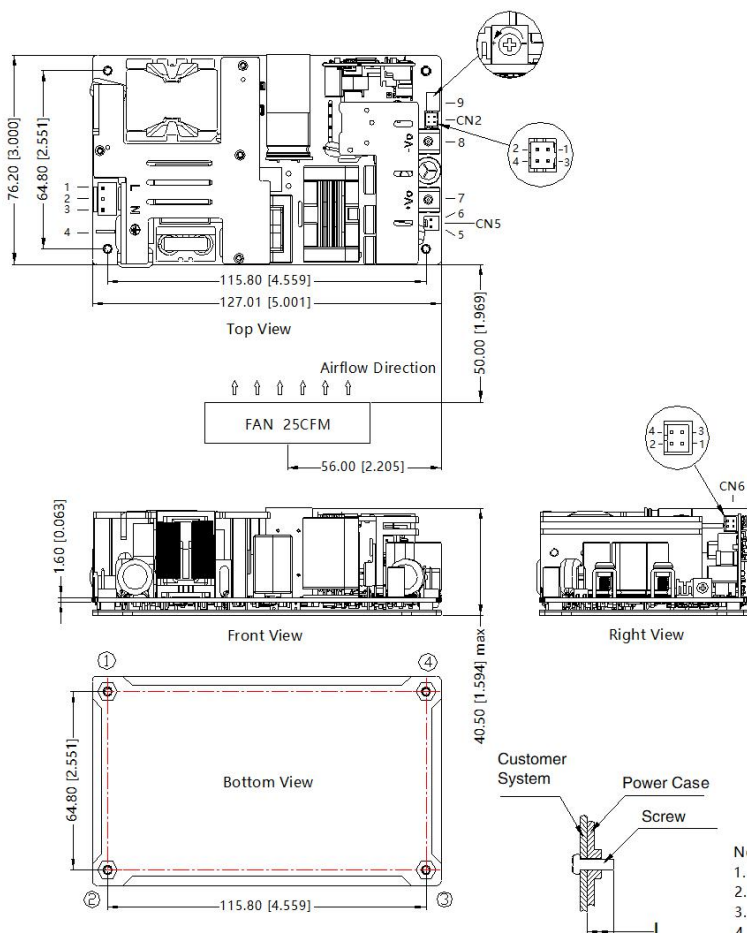

Position	Screw Spec.	L(Recommend)	Torque(max)
① - ④	M3	2.5mm	0.4N·m


Pin-Out		Customer Connector
Pin	Mark	
1	AC(L)	Housing: JST VHR or equivalent Contact: JST SVH-21T-P1.1 or equivalent
2	NC	
3	AC(N)	
4	⊥	CN5: Fan power output port Housing: TKP 2502 or equivalent Contact: TKP 8811 or equivalent
5	FAN+	
6	FAN-	
7	+Vo	
8	-Vo	
9	ADJ Output adjustable resistor	

Pin-Out		Customer Connector
Pin	Mark	
1	+5V	Housing: JST PHD-2*2Y or equivalent Contact: JST PHD-TE or equivalent
2	GND	
3	PS-ON	CN6: PS_ON signal input port(3-4) 5VDC Standby output(1-2)
4	GND	

Pin-Out		Customer Connector
Pin	Mark	
1	RS-	Housing: JST PHD-2*2Y or equivalent Contact: JST PHD-TE or equivalent
2	RS+	
3	GND	
4	PG	

Note:

- Unit: mm[inch]
- Pin7,8 connector tightening torque: M4, 1.2N·m(max)
- General tolerances: $\pm 1.00[\pm 0.039]$
- The layout of the device is for reference only, please refer to the actual product
- It is recommended 10mm distance between the PCB and other components for safety purpose
- Class I system ①②④ positions must be connected to the earth (⊥)

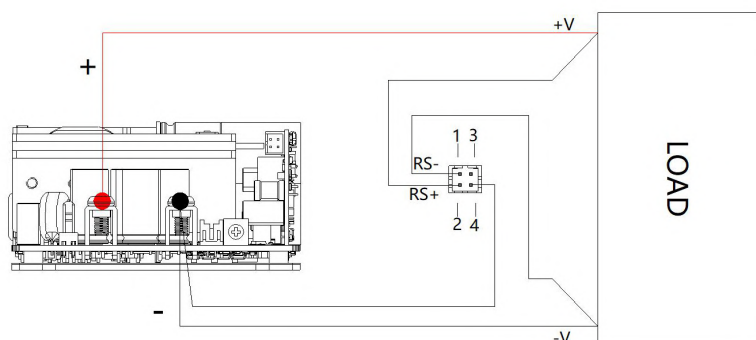

Remote sensing function wiring diagram

Note:

- RS - and RS + cannot be shorted or reversed, otherwise the power module will be damaged;
- The remote compensation function can compensate the voltage drop on the output cable, which includes the sum of the cable drop connected to the output positive terminal and the output negative terminal;
- If you need to use remote compensation function, the signal pin needs to be connected with the load and with a twisted pair, otherwise the power module will be damaged.

AC/DC 550W Open Frame Power Supply

SLOF550-20Bxx Series

Note:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% RH with nominal input voltage and rated output load;
2. All index testing methods in this datasheet are based on our company corporate standards;
3. In order to improve the efficiency, there will be audible noise generated when work at light load, but it does not affect product performance and reliability;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. The out case needs to be connected to PE (\oplus) of system when the terminal equipment in operating;
7. CAUTION: Double pole, neutral fusing. Disconnect mains before servicing." / "ATTENTION: Double pôle/fusible sur le neutre. Débrancher l'alimentation avant l'entretien;
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
9. The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.