

# SNL1 Series



1W Unregulated Single output

## Features

- 4 Pin SIL Package
- Continuous Short Circuit Protection
- 3000 VDC Isolation
- Efficiency up to 83%
- Operation Temperature Range -40 ~ 95°C max.
- Non-Conductive Black Plastic Case



## PART NUMBER STRUCTURE

**SNL1** - **12** **12** **S**  
(1) (2) (3) (4)

### (1) Series

### (2) Input Voltage Range

**3R3** - 2.97-3.63 V  
**05** - 4.5-5.5 V  
**12** - 10.8-13.2 V  
**24** - 21.6-26.4 V

### (4) Output Type

**S** - Single Output

### (3) Output Voltage Range

**3R3** - 3.3 V  
**05** - 5 V  
**12** - 12 V  
**15** - 15 V

SNL1 1W Unregulated Single output

ALL SPECIFICATIONS ARE TYPICAL AT 25°C, NOMINAL INPUT AND FULL LOAD UNLESS OTHERWISE NOTED

Model Number	Input Voltage Range (VDC)	Input Current		Output Voltage (VDC)	Output Current Full Load (mA)	Efficiency @FL(%)	Capacitive Load (µF)
		No-Load (mA), max.	Full Load (mA), typ.				
SNL1-3R33R3S	2.97-3.63	60	388.5	3.3	303	78	3300
SNL1-3R305S	2.97-3.63	65	383.58	5	200	79	2200
SNL1-3R312S	2.97-3.63	75	374.11	12	83.33	81	470
SNL1-3R315S	2.97-3.63	75	374.11	15	66.67	81	470
SNL1-053R3S	4.5-5.5	45	259.74	3.3	303	77	3300
SNL1-0505S	4.5-5.5	45	253.16	5	200	79	2200
SNL1-0512S	4.5-5.5	55	243.9	12	83.33	82	470
SNL1-0515S	4.5-5.5	60	246.91	15	66.67	81	470
SNL1-123R3S	10.8-13.2	25	106.83	3.3	303	78	3300
SNL1-1205S	10.8-13.2	25	101.62	5	200	82	2200
SNL1-1212S	10.8-13.2	25	100.4	12	83.33	83	470
SNL1-1215S	10.8-13.2	30	102.88	15	66.67	81	470
SNL1-243R3S	21.6-26.4	15	54.11	3.3	303	77	3300
SNL1-2405S	21.6-26.4	15	52.74	5	200	79	2200
SNL1-2412S	21.6-26.4	15	50.81	12	83.33	82	470
SNL1-2415S	21.6-26.4	15	50.2	15	66.67	83	470

SNL1 1W Unregulated Single output

INPUT SPECIFICATIONS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	3.3 V Input	2.97	3.3	3.63	VDC
	5 V Input	4.5	5	5.5	
	12 V Input	10.8	12	13.2	
	24 V Input	21.6	24	26.4	
Input Filter		Capacitors			
Input Reflected Ripple Current (1)			20		mApk-pk
Start up Time	Nominal Vin and constant resistive load			10	ms
Recommended input fuse ( slow blow )	3.3 V Input	1			A
	05 V Input	0.5			A
	12 V Input	0.25			A
	24 V Input	0.1			A
Note :					
1. Measured with a simulated source inductance of 12μH and a source capacitor Cin( 47μF, ESR<1.0Ω at 100KHz ).					

OUTPUT SPECIFICATIONS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Nominal Vin	-3.0		+3.0	%
Line Regulation	For 1% Vin Change	-1.2		+1.2	%
Load Regulation	From 10% to 100% Load	3.3 V , 5V Output		15	%
		Other Output		10	
	From 0% to 100% Load			35	
Ripple & Noise (1)	20MHz bandwidth			200	mVpk-pk
Short Circuit Protection		Continuous and automatic recovery			
Temperature Coefficient		-0.02		+0.02	%/°C
Capacitive Load	Nominal Vin and constant resistive load	See Table			
Note :					
1. Measured with a 0.1μF MLCC.					

ABSOLUTE MAXIMUM RATINGS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage ( 100 ms )	3.3 V Input			6	VDC
	5 V Input			9	
	12 V Input			18	
	24 V Input			30	
Soldering Temperature	1.5mm from case 10sec max.			260	°C
Note : These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.					

SNL1 1W Unregulated Single output



GENERAL SPECIFICATIONS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output, and rated for 60sec	3000			VDC
Isolation Resistance	Input-output	1000			MΩ
Isolation Capacitance	Input-output			65	pF
Switching Frequency			100		kHz
MTBF	MIL-HDBK-217 F @ 25°C	2.1			Mhours
Safety Standard	IEC / EN / UL 62368-1	Designed to meet			
Environmental compliance		RoHS			

ENVIRONMENT SPECIFICATIONS					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating Ambient Temperature	See Power Derating Curve	-40		95	°C
Maximum Case Temperature				115	°C
Thermal Impedance		50			°C/W
Storage Humidity				95	% rel. H
Storage Temperature		-55		125	°C
Cooling	Natural Convection	30-65 LFM			


EMC SPECIFICATIONS			
Parameter	Standard	Condition	Perf. Criteria
Conducted Emissions	EN55032	with external components	B
Radiated Emissions	EN55032		B
ESD	IEC 61000-4-2	Air: ±15kV / Indirect: ±8kV	A
RS	IEC 61000-4-3	10V/m	A
EFT	IEC 61000-4-4	±2.0kV with external components	A
Surge	IEC 61000-4-5	±2.0kV with external components	A
CS	IEC 61000-4-6	10Vrms	A
PFMF	IEC 61000-4-8	100A/m	A

PHYSICAL SPECIFICATIONS	
Parameter	Value
Case Material	Nonconductive Black Plastic ( UL94V-0 rated )
Pin Material	Tinned Copper
Potting Material	Silicone ( UL94V-0 rated )
Weight	1.5 g, typ.
Dimensions	0.46" x 0.24" x 0.4"

**ELECTRICAL CHARACTERISTIC CURVES**

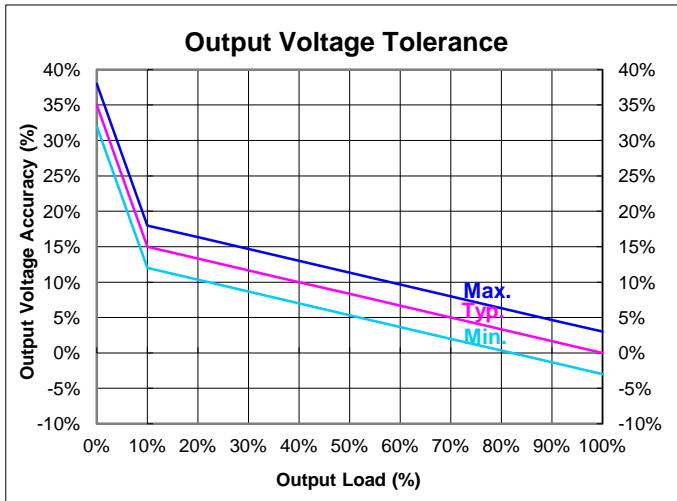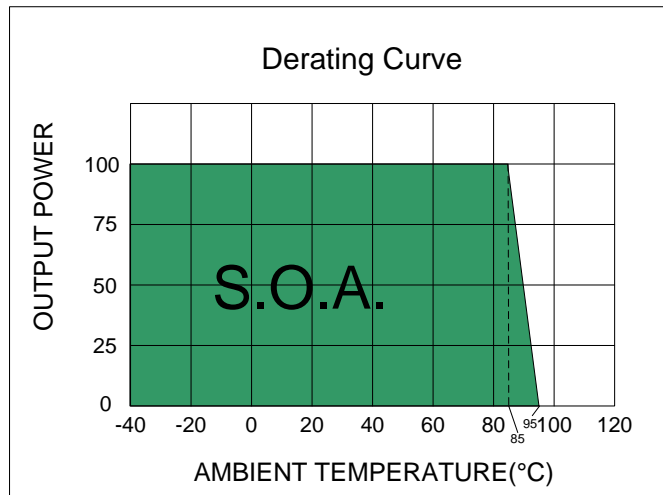

3.3V and 5V output

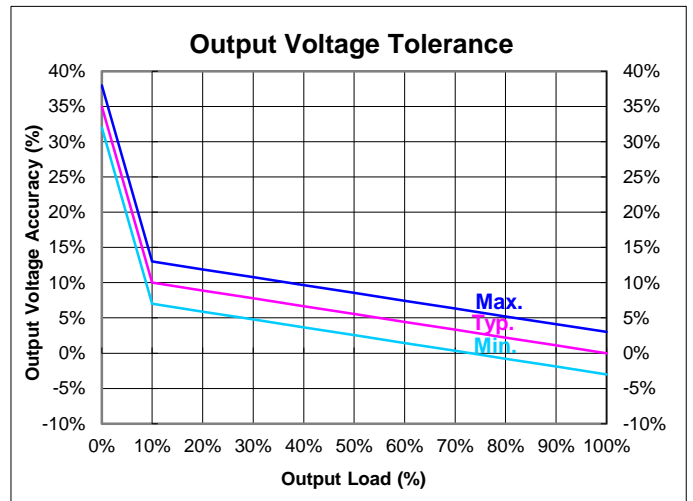


12V and 15V output

**TEST CONFIGURATIONS**

### Input Reflected Ripple Current Test Step

Input reflected ripple current is measured with a source inductor  $L_{in}$  ( $12\mu H$ ) and a source capacitor  $C_{in}$  ( $47\mu F$ ,  $ESR < 1.0\Omega$  at  $100KHz$ ) at nominal input and full load.

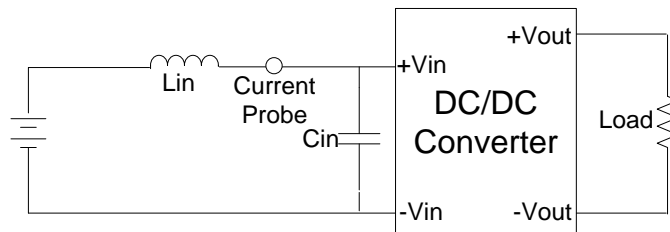

## DESIGN & FEATURE CONFIGURATIONS

### Isolation Voltage

This series is designed to meet the functional insulation of UL, both input and output should be maintained within SELV limits ( less than 42.4V peak, or 60VDC ).

The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with hundreds of volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

### Repeated High-Voltage Isolation Testing

Repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment.

This series has isolation transformers without additional insulation between primary and secondary windings of enameled wire.

While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation.


Any material including the enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltage, thus implying that the number of tests should be strictly limited.

We strongly advise against repeated high voltage isolation testing, but if it is absolutely required, the isolation test voltage should be reduced by 20% from specified test voltage.

**DESIGN & FEATURE CONFIGURATIONS**

**EMC Filter**



The part (1) Circuit is used to meet Surge & EFT test, and the part (2) Circuit is used to meet EMI test.

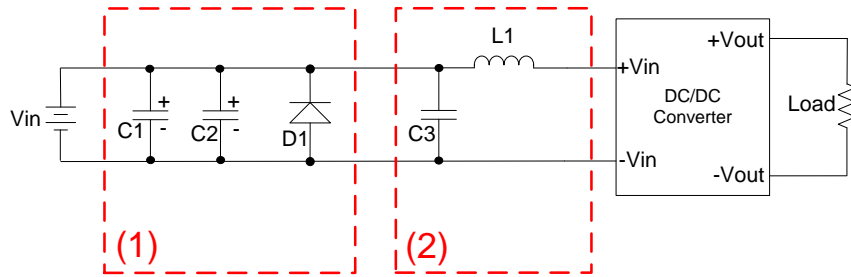

Vin	C1	C2	D1	C3	L1
5V	NIPPON Chemi-con KY Series 470µF, 100V	DNP	SMDJ6.0A	MLCC 10µF, 50V	10µH
12V			SMDJ9.0A		
15V			SMDJ18.0A		
24V		NIPPON Chemi-con KY Series 680µF, 100V	SMDJ30.0A		

**DESIGN & FEATURE CONFIGURATIONS**


**4 Pin SIL Package**

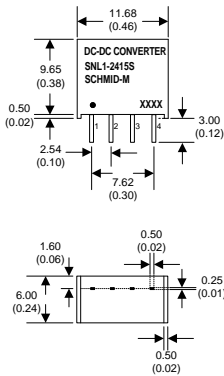

- Notes : All dimensions are typical in millimeters ( inches ).
1. Pin dimension tolerance :  $\pm 0.05$  (  $\pm 0.002$  )
  2. Pin pitch and length tolerance:  $\pm 0.35$  (  $\pm 0.014$  )
  3. Pin to case tolerance:  $\pm 0.5$  (  $\pm 0.02$  )
  4. Case tolerance:  $\pm 0.5$  (  $\pm 0.02$  )

PIN CONNECTIONS	
PIN NUMBER	SINGLE
1	-Vin
2	+Vin
3	-Vout
4	+Vout

**RECOMMEND FOOTPRINT DETAILS**



- Notes : All dimensions are typical in millimeters ( inches ).
- Pad size(lead free recommended)
1. Through hole 1.2.3.4:  $\Phi 0.031$ [0.80]
  2. Top view pad 1.2.3.4:  $\Phi 0.039$ [1.10]  
pad 2 to pad 3 spacing: 0.067[1.70]
  3. Bottom view pad 1.2.3.4:  $\Phi 0.063$ [1.60]  
pad 2 to pad 3 spacing: 0.067[1.70]
  4. The extra protection of the pads between input(PIN 2) and output(PIN 3) should be needed in order to ensure that the isolation function won't be affected after the module mounts on the PCB.