

## FEATURES

- Universal 90 - 132VAC/180 - 264VAC input voltage
- DC input range: 240 - 370VDC(Switch in position of 230)
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: - 40°C to +85°C
- High I/O isolation test voltage up to 4000VAC, operating altitude up to 5000m
- Compact size, high power density
- High efficiency, high reliability
- Output short circuit, over-current, over-voltage, over-temperature protection
- OVC III (designed to meet EN62477)



RoHS



*SLM200-20BxxR2 series is the ultra-small second-generation new industrial standard enclosed power supply, which has innovated the industrial power supply standard from the aspect of dimension, performance, technology and structure. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, UL/EN/IEC/BS EN62368, EN/IEC60335, EN61558, EN62477, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.*

## Selection Guide

Certification	Part No.	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range ADJ (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (uF)
		Steady state				
EN/CQC (Pending)	SLM200-20B12R2	204	12V/17A	11.4-13.8	89	4000
	SLM200-20B15R2	210	15V/14A	14.25-17.25	89	3300
	SLM200-20B24R2	211.2	24V/8.8A	22.8-27.6	91	1500
	SLM200-20B36R2	212.4	36V/5.9A	34.2-41.4	91.5	1500
	SLM200-20B48R2	211.2	48V/4.4A	43.2-52.8	92	470
	SLM200-20B54R2	210.6	54V/3.9A	51.3-56.7	92	330

Note: \*Use suffix "C" for terminal with protective cover, suffix "Q" for bottom conformal coating and "QQ" for both sides conformal coating.

## Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range (by switch)	AC input	Low voltage (switch in position of 115)	90	--	132	VAC
		High voltage (switch in position of 230)	180	--	264	
	DC input	Switch in position of 230	240	--	370	VDC
Input Voltage Frequency			47	--	63	Hz
Input Current	115VAC		--	--	5	A
	230VAC		--	--	3	
Inrush Current	115VAC	Cold start	--	60	80	
	230VAC		--	60	80	
Leakage Current	240VAC		<0.75mA			
Hot Plug			Unavailable			

## Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	12V/15V	--	±1.5	--	%
		24V/36V/48V/54V	--	±1.0	--	

# AC/DC 200W Enclosed Switching Power Supply

## SLM200-20BxxR2(-C, -Q, -CQ, -QQ, -CQQ) Series



Line Regulation	Rated load	--	±0.5	--		
Load Regulation	0% - 100% load	12V/15V	--	±1.0	--	
		24V/36V/48V/54V	--	±0.5	--	
Output Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	12V/15V/24V	--	150	--	mV
		36V/48V/54V	--	200	--	
Temperature Coefficient		--	--	±0.03	%/°C	
Minimum Load		0	--	--	%	
Stand-by Power Consumption	230VAC, 25°C	--	--	0.75	W	
Hold-up Time	115VAC	8	--	--	ms	
	230VAC	16	--	--		
Short Circuit Protection	Recovery time <5s after the short circuit disappear.	Hiccup, continuous, self-recover				
Over-current Protection		120% - 250% Io, hiccup, self-recover after fault elimination				
Over-voltage Protection	12V	≤ 16.2VDC (hiccup or clamp, self-recover after fault elimination)				
	15V	≤ 21VDC (hiccup or clamp, self-recover after fault elimination)				
	24V	≤ 33.6VDC (hiccup or clamp, self-recover after fault elimination)				
	36V	≤ 46.8VDC (hiccup or clamp, self-recover after fault elimination)				
	48V	≤ 60VDC (hiccup or clamp, self-recover after fault elimination)				
	54V	≤ 63VDC (hiccup or clamp, self-recover after fault elimination)				
Over-temperature Protection		Output voltage turn off, self-recover after fault elimination				
Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.						

### General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input - ⊕	Electric strength test for 1min., leakage current <5mA	2000	--	--	VAC
	Input - output		4000	--	--	
	Output - ⊕		500	--	--	
Insulation Resistance	Input - ⊕	At 500VDC	100	--	--	MΩ
	Input - output		100	--	--	
	Output - ⊕		100	--	--	
Operating Temperature			-40	--	+85	°C
Storage Temperature			-40	--	+85	
Storage Humidity	Non-condensing		10	--	95	%RH
Operating Humidity			20	--	90	
Power Derating	Operating temperature derating	-40°C to -30°C	5	--	--	% / °C
		+50°C to +70°C	2.5	--	--	
		+70°C to +85°C	1.33	--	--	
	Input voltage derating	90VAC - 100VAC	3.5	--	--	%/VAC
Safety Standard			Design refer to UL/EN/IEC/BS EN62368-1, EN/IEC60335-1, EN61558-1, EN62477-1, GB4943.1			
Safety Class			CLASS I			
MTBF			MIL-HDBK-217F@25°C > 300,000 h			

### Mechanical Specifications

Case Material	Metal (AL5052, SGCC)
Dimensions	159.00 x 97.00 x 30.00 mm
Weight	415g (Typ.)
Cooling Method	Free air convection

### Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS A	
	RE	CISPR32/EN55032	CLASS A	
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 6KV$ /Air $\pm 8KV$	perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2KV$	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line $\pm 2KV$ /line to PE $\pm 4KV$	perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	PFMF	IEC/EN61000-4-8	30A/m	perf. Criteria A
	Voltage dip, short interruption and voltage	IEC/EN61000-4-11	0%, 70%	perf. Criteria B

Remark:

1. This power supply does not meet the harmonic current requirements specified in EN61000-3-2.



Please do not use this power supply under the following conditions:

- 1) The terminal equipment is used in the European Union.
- 2) Supporting terminals are connected to a public power grid with 220VAC or a higher voltage that comply with the requirements of EN61000-3-2.
- 3) The power supply is installed in terminal equipment with average or continuous input power greater than 75W.
- 4) The power supply belong to a part of lighting system.



Exception: The power supply used in the following terminal equipment does not need to meet EN61000-3-2.

- 1) Professional equipment with a total rated input power greater than 1000W.
- 2) Symmetrically controlled heating element with a rated power less than or equal to 200W.

### Product Characteristic Curve

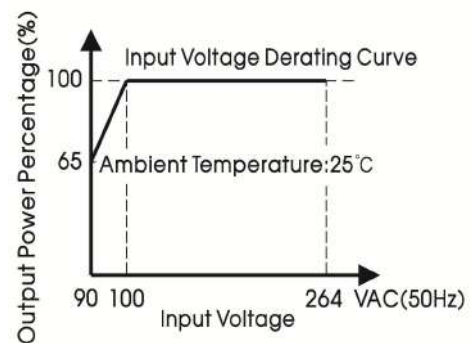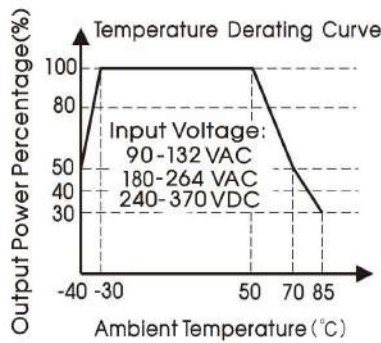


- Note: 1. With an input voltage between 90-100VAC the output power must be derated as per the temperature derating curves;  
2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult FAE.

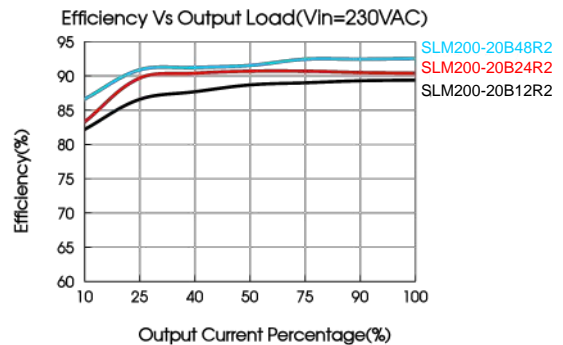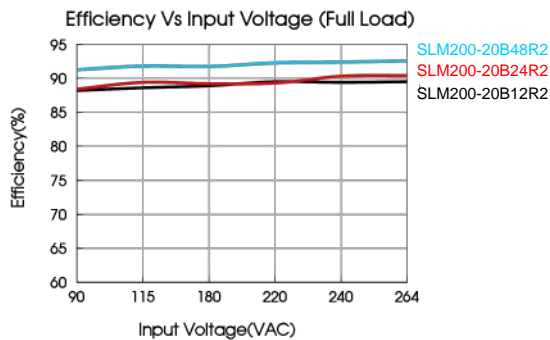

### Dimensions and Recommended Layout

#### SLM200-20BxxR2(-Q, -QQ) Series

THIRD ANGLE PROJECTION

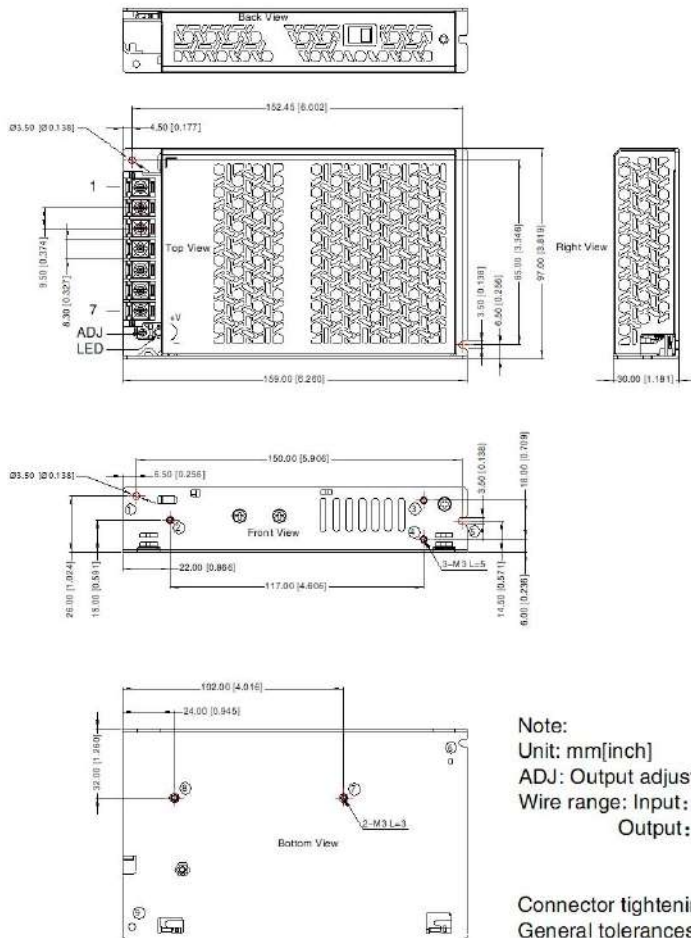


Pin-Out	
Pin	Mark
1	AC(L)
2	AC(N)
3	
4	-Vo
5	-Vo
6	+Vo
7	+Vo

①-⑨ any position must be connected to the earth(⊕)

Switch	AC Input	DC input
	90-132VAC	---
	180-264VAC	240-370VDC


Position	Screw Spec.	L(max)	Torque(max)
②-④	M3	5mm	0.4N · m
⑦-⑧	M3	3mm	0.4N · m



**Note:**  
 Unit: mm[inch]  
 ADJ: Output adjustable resistor  
 Wire range: Input: 28-10AWG(16-10AWG for pin3)  
 Output: 12V, 15V: 12-10AWG  
 24V, 36V: 16-10AWG  
 48V, 54V: 20-10AWG  
 Connector tightening torque: M3.5, 0.8N · m max.  
 General tolerances:  $\pm 1.00[\pm 0.039]$

### SLM200-20BxxR2-C (-CQ, -CQQ) Series

THIRD ANGLE PROJECTION

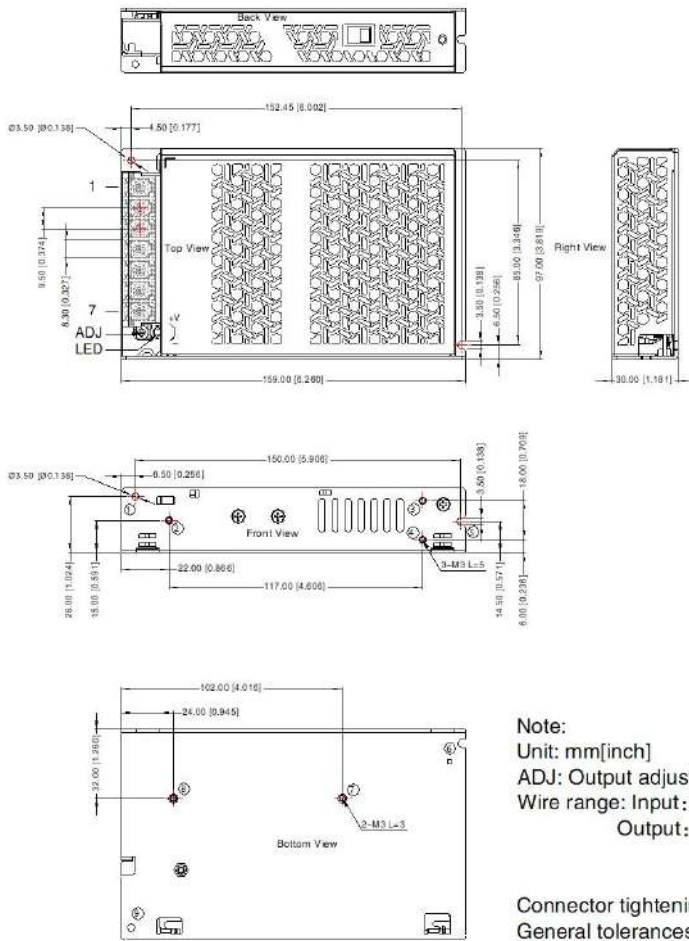


Pin-Out	
Pin	Mark
1	AC(L)
2	AC(N)
3	
4	-Vo
5	-Vo
6	+Vo
7	+Vo

①-③ any position must be connected to the earth(⊕)

Switch	AC Input	DC Input
	90-132VAC	---
	180-264VAC	240-370VDC

Position	Screw Spec.	L(max)	Torque(max)
②-④	M3	5mm	0.4N · m
⑦-⑧	M3	3mm	0.4N · m



**Note:**  
 Unit: mm[inch]  
 ADJ: Output adjustable resistor  
 Wire range: Input: 28-10AWG(16-10AWG for pin3)  
 Output: 12V, 15V: 12-10AWG  
 24V, 36V: 16-10AWG  
 48V, 54V: 20-10AWG  
 Connector tightening torque: M3.5, 0.8N · m max.  
 General tolerances: ± 1.00[± 0.039]