

AC/DC Converter

SLD60-23BxxR2 Series



60W, AC-DC converter



FEATURES

- Universal 85-305VAC or 100-430VDC input voltage
- Operating ambient temperature range: -40°C to +85°C
- High I/O isolation test voltage up to 4200VAC
- Up to 91% efficiency
- Compact size, high power density
- Output short circuit, over-current, over-voltage protection
- 5000m altitude application
- OVC III (meet EN62477, 5000m altitude)
- Meets Emissions CLASS B and surge $\pm 2\text{KV}$ without additional circuits



UL62368-1 EN62368-1 IEC62368-1 BS EN 62368-1

SLD60-23BxxR2 series AC-DC converters is one of SCHMID-M's new generation compact size power converters. It features ultra-wide AC input and at the same time accepts DC input voltage, low power consumption, low ripple & noise, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets IEC/UL/EN62368, IEC/EN60335/62477, EN61558 standards. The converters are widely used in industrial, power, home appliances, instrumentation, communication and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
IEC/UL/EN	SLD60-23B05R2	50	5V/10A	89	20000
	SLD60-23B12R2	60	12V/5A	91	5000
	SLD60-23B15R2		15V/4A	90	3000
	SLD60-23B24R2		24V/2.5A	90	1800
	SLD60-23B48R2		48V/1.25A	91	470
--	SLD60-23B55R2	60.5	55.5V/1.09A	91	470

Note: * ① Use suffix "A2S" for chassis mounting and suffix "A4S" for Din-Rail mounting;
 ② SLD60-23B55R2 of product does not involve certification and expansion package;
 ③ The product picture is for reference only. For details, please refer to the actual product.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	305	VAC
	DC input	100	--	430	VDC
Input Frequency		47	--	63	Hz
Input Current	115VAC	--	--	1.8	A
	230VAC	--	--	1.0	
Inrush Current	115VAC	--	30	--	
	230VAC	--	60	--	
Leakage Current	277VAC/50Hz	0.25mA RMS Max.			
Fuse		3.15A/300V, slow-blow, required			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		--	± 2	--	%
Line Regulation	Full load	--	± 1	--	
Load Regulation	0%-100% load	--	± 1.5	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	80	150	mV

AC/DC Converter

SLD60-23BxxR2 Series



Stand-by Power Consumption	230VAC	--	0.3	0.45	W
Temperature Coefficient		--	±0.02	--	%/°C
Short Circuit Protection		Hiccup, continuous, self-recovery			
Over-current Protection		≥140% Io, self-recovery			
Over-voltage Protection	5VDC output	≤9VDC (Hiccup or clamp)			
	12VDC output	≤16VDC (Hiccup or clamp)			
	15VDC output	≤25VDC (Hiccup or clamp)			
	24VDC output	≤35VDC (Hiccup or clamp)			
	48VDC output	≤60VDC (Hiccup or clamp)			
	55.5VDC output	≤70VDC (Hiccup or clamp)			
Minimum Load		0	--	--	%
Hold-up Time	115VAC input	--	8	--	ms
	230VAC input	--	65	--	

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 1uF ceramic capacitor, please refer to AC-DC Converter Application Notes for specific information.

General Specifications

Item		Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output	Electric Strength Test for 1min., leakage current <5mA	4200	--	--	VAC
Insulation Resistance	Input - output	Test voltage at 500VDC	100	--	--	MΩ
Operating Temperature			-40	--	+85	°C
Storage Temperature			-40	--	+85	
Storage Humidity			--	--	95	%RH
Soldering Temperature		Wave-soldering	260 ± 5°C; time: 5 - 10s			
		Manual-welding	360 ± 10°C; time: 3 - 5s			
Power Derating	-40°C to -25°C (85-200VAC input)		3.33	--	--	% / °C
	-40°C to -25°C (200-305VAC input)		1.33	--	--	
	+40°C to +70°C (5VDC output)		1.5	--	--	
	+45°C to +70°C (85-165VAC input, 12/15/24/48/55.5VDC output)		1.8	--	--	
	+50°C to +70°C (≥165VAC input, 12/15/24/48/55.5VDC output)		2.25	--	--	
	+70°C to +85°C		2	--	--	
	85VAC - 100VAC		1.33	--	--	% / VAC
	277VAC - 305VAC		0.72	--	--	
Operating Altitude Derating		2000m - 5000m	6.67	--	--	%/Km
Safety Standard	5/12/15/24/48VDC		UL/IEC62368-1 safety approved & EN62368-1, BS EN 62368-1(Report); Design refer to IEC/EN60335-1/62477-1, EN61558-1			
	55.5VDC		Design refer to UL/IEC/EN/BS EN 62368-1, IEC/EN60335-1, IEC/EN62477-1, EN61558-1			
Safety Class			CLASS II			
MTBF		MIL-HDBK-217F@25°C	≥500,000 h			

Mechanical Specifications

Case Material		Black plastic, flame-retardant and heat-resistant (UL94V-0)
Dimension	Horizontal package	70.00 x 48.00 x 27.00 mm
	A2 chassis mounting	96.10 x 54.00 x 35.50 mm
	A4 Din-Rail mounting	96.10 x 54.00 x 40.10 mm

AC/DC Converter

SLD60-23BxxR2 Series







Weight	Horizontal package	130g (Typ.)
	A2S chassis mounting	177g (Typ.)
	A4S Din-Rail mounting	220g (Typ.)
Cooling Method		Free air convection

Electromagnetic Compatibility (EMC)



Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$	perf. Criteria A
		IEC/EN61000-4-4	$\pm 4\text{KV}$ (See Fig. 2 for recommended circuit)	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{KV}$	perf. Criteria A
		IEC/EN61000-4-5	line to line $\pm 2\text{KV}$ /line to PE $\pm 4\text{KV}$ (See Fig. 2 for recommended circuit)	perf. Criteria A
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B

Product Characteristic Curve

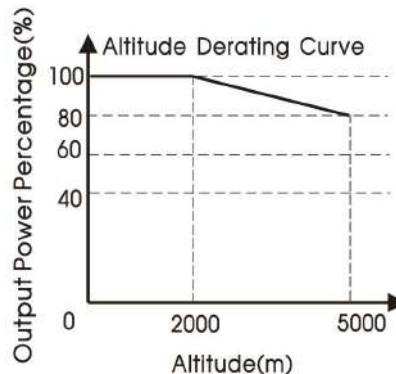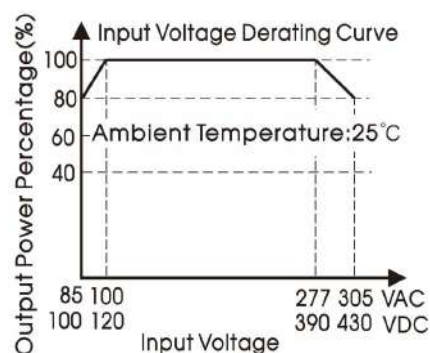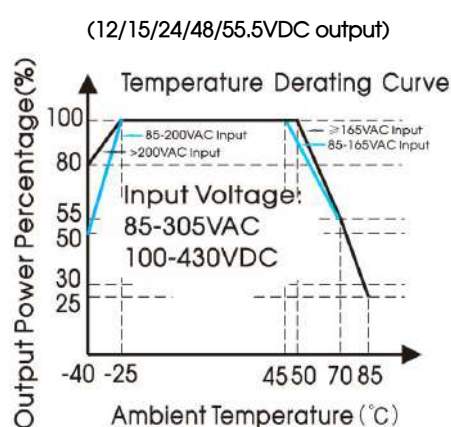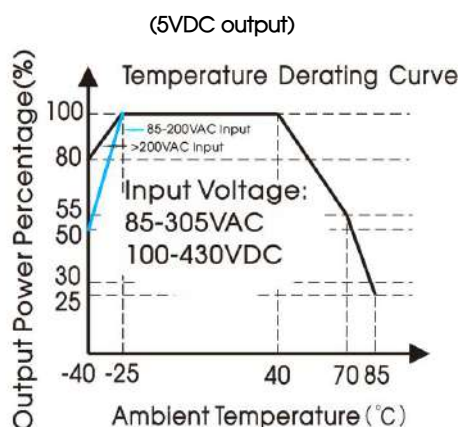

Note: ① With an AC input between 85-100VAC/277-305VAC and a DC input between 100-120VDC/390-430VDC, the output power must be derated as per temperature derating curves;

② This product is suitable for applications using natural air cooling; for applications in closed environment please consult SCHMID-M FAE.

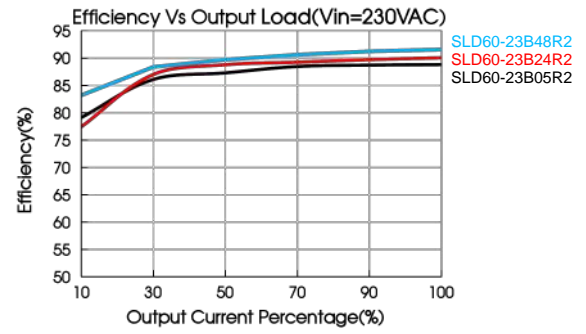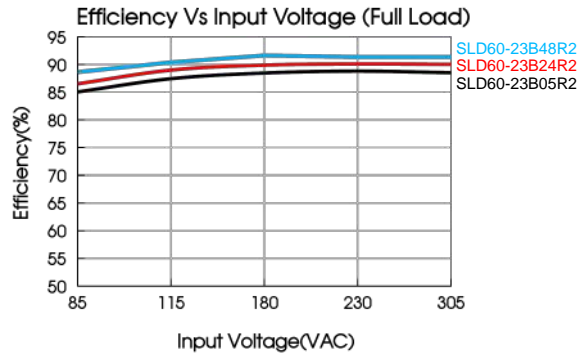

Design Reference

1. Typical application

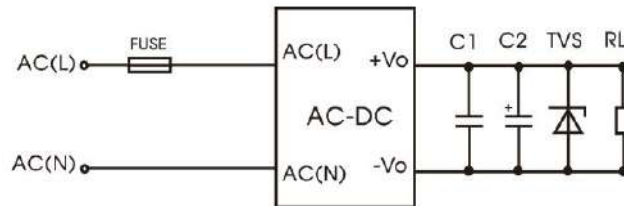


Fig. 1: Typical circuit diagram

Part No.	C1	C2	FUSE	TVS
SLD60-23B05R2	1uF/50V	470uF/16V	3.15A/300V slow-blow, required	SMBJ10A
SLD60-23B12R2		330uF/25V		SMBJ20A
SLD60-23B15R2		330uF/25V		SMBJ30A
SLD60-23B24R2		220uF/35V		SMBJ40A
SLD60-23B48R2	1uF/100V	100uF/63V		SMBJ60A
SLD60-23B55R2		100uF/100V		SMBJ60A

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. EMC compliance recommended circuit

SCHMID-M P/N: SFC-L03D2


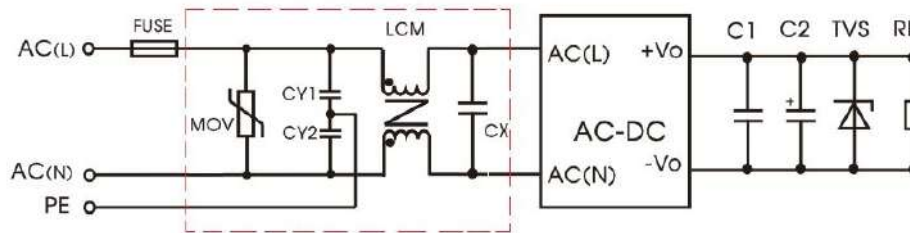



Fig. 2: EMC application circuit with higher requirements

Component	Recommended value
FUSE	3.15A/300V, slow-blow, required
MOV	S14K350
CY1/CY2	1nF/400VAC
CX	684K/310V
LCM	20mH, P/N: SFL2D-10-203 is recommended

Dimensions and Recommended Layout

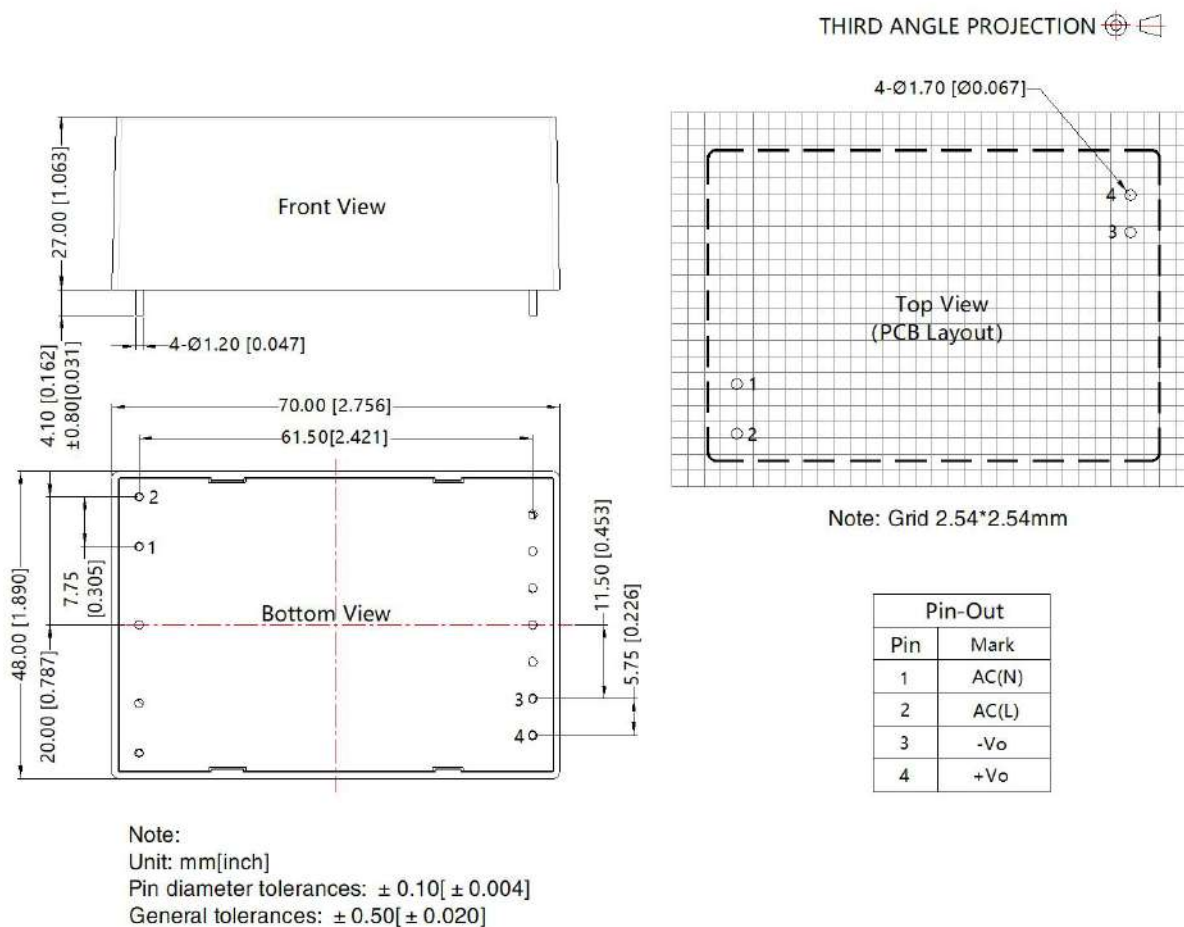


A2S Dimensions

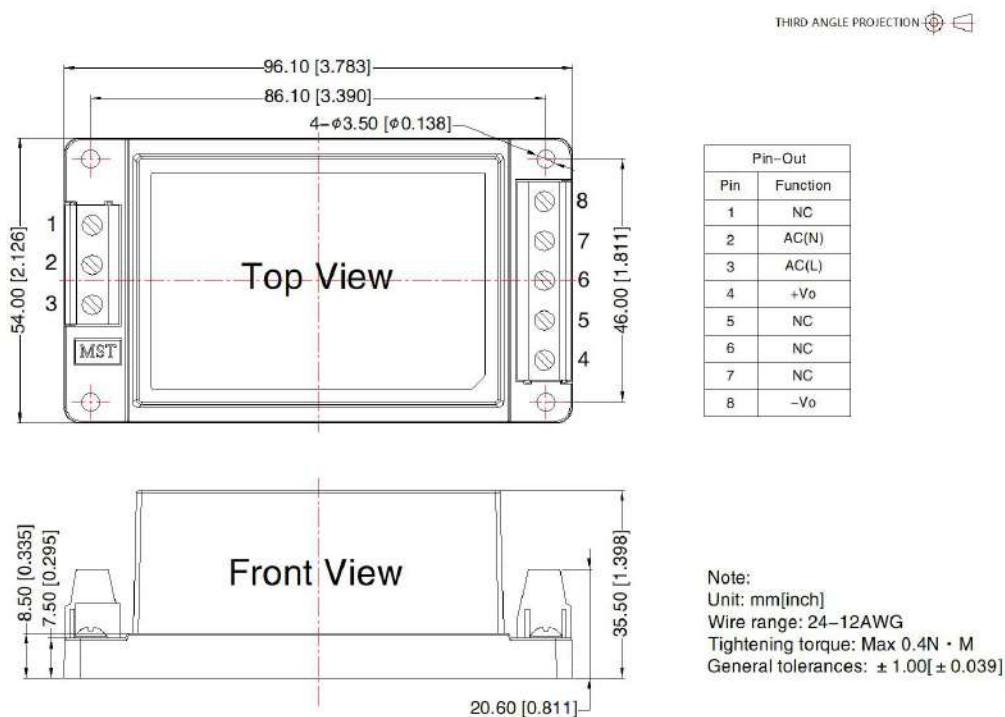


A4S Dimensions

THIRD ANGLE PROJECTION

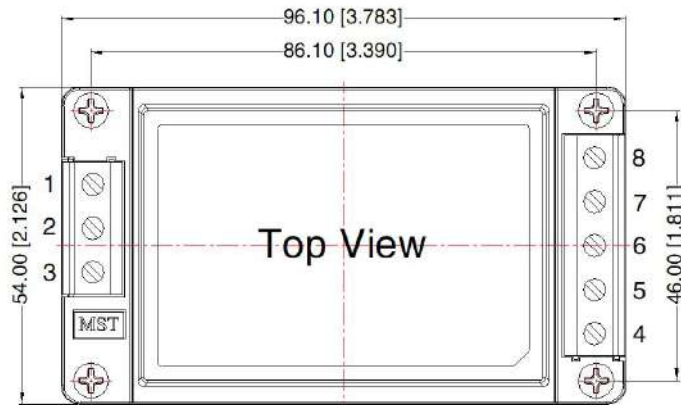

Pin-Out	
Pin	Function
1	NC
2	AC(N)
3	AC(L)
4	+Vo
5	NC
6	NC
7	NC
8	-Vo

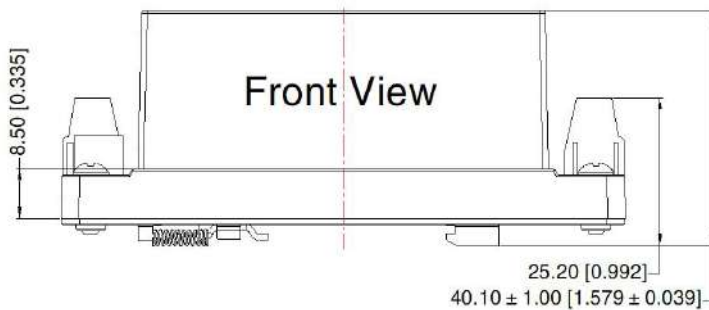

Note:
Unit: mm[inch]
Mounting rail: TS35, rail needs to connect safety ground
Wire range: 24-12AWG
Tightening torque: Max 0.4N · M
General tolerances: ± 1.00[± 0.039]

Note:

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. If product involves multi-brand materials and there are differences in color etc, please refer to the standards of each manufacturer;
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.