

40W isolated AC-DC converter with ultra-wide, ultra-high 85 - 900VAC input for coalmine



RoHS

## FEATURES

- Specially designed for electrical equipment in coal mining industry
- Ultra-wide 85 - 900VAC input voltage range
- Industrial grade operating temperature: -25°C to +70°C
- High I/O isolation test voltage of 4000VAC
- High reliability, high efficiency, long lifespan
- Output short circuit, over-current and over-voltage protection
- Immunity, EFT/Surge: ±4KV perf. Criteria B

SPVA40-27Bxx series is a special power supply designed for customers who provide electrical equipment for coal mining industry to meet the requirements of safety in providing power supply, easy mounting and technology innovation etc. It features ultra-wide input voltage range from 85 to 900VAC which covers 127/220/380/660VAC used in coal mining industry, high isolation voltage, excellent EMS performance, multiple protections and high efficiency. They are widely used in monitoring and security sectors of coal mining industry.

## Selection Guide

| Part No.     | Output Power | Nominal Output Voltage and Current (Vo/Io) | Efficiency at 380VAC (%) Typ. | Capacitive Load (µF) Max. |
|--------------|--------------|--|-------------------------------|---------------------------|
| SPVA40-27B18 | 40W          | 18V/2222mA                                 | 86                            | 1000                      |
| SPVA40-27B24 | 40W          | 24V/1667mA                                 | 86                            | 800                       |
| SPVA40-27B30 | 40W          | 30V/1333mA                                 | 86                            | 600                       |

## Input Specifications

| Item                | Operating Conditions | Min.                 | Typ. | Max. | Unit |
|---------------------|----------------------|----------------------|------|------|------|
| Input Voltage Range |                      | 85                   | --   | 900  | VAC  |
| Input Current       | 127VAC               | --                   | --   | 0.85 | A    |
|                     | 380VAC               | --                   | --   | 0.55 |      |
|                     | 660VAC               | --                   | --   | 0.35 |      |
| Inrush Current      | 660VAC               | --                   | --   | 140  |      |
|                     | 900VAC               | --                   | --   | 180  |      |
| External input Fuse |                      | 2A/1000VAC, required |      |      |      |
| Hot Plug            |                      | Unavailable          |      |      |      |

## Output Specifications

| Item                     | Operating Conditions                 | Min.                              | Typ.  | Max. | Unit |    |
|--------------------------|--------------------------------------|-----------------------------------|-------|------|------|----|
| Output Voltage Accuracy  | All load range                       | --                                | ±2    | --   | %    |    |
| Line Regulation          | Rated load                           | --                                | ±1    | --   |      |    |
| Load Regulation          | 10% - 100% load                      | --                                | ±1    | --   |      |    |
| Ripple & Noise*          | 20MHz bandwidth (peak-to-peak value) | --                                | 100   | 200  | mV   |    |
| Temperature Coefficient  |                                      | --                                | ±0.02 | --   | %/°C |    |
| Short Circuit Protection |                                      | Hiccup, continuous, self-recovery |       |      |      |    |
| Over-current Protection  |                                      | ≥110%Io, hiccup, self-recovery    |       |      |      |    |
| Over-voltage Protection  | 18V output                           | ≤30VDC                            |       |      |      |    |
|                          | 24V output                           | ≤35VDC                            |       |      |      |    |
|                          | 30V output                           | ≤45VDC                            |       |      |      |    |
| Min. Load                |                                      | 0                                 | --    | --   | %    |    |
| Hold-up Time             | Room temperature, Full load          | 380VAC input                      | --    | 60   | --   | ms |
|                          |                                      | 660VAC input                      | --    | 240  | --   |    |

Note: \* The "Tip and barrel method" is used for ripple and noise test, please refer to PV Converter Application Notes for specific information.

### General Specifications

| Item                  | Operating Conditions                             | Min.  | Typ. | Max. | Unit                  |
|-----------------------|--|---|------|------|-----------------------|
| Isolation Test        | Input - output                                   | Electric Strength Test for 1min., leakage current $\leq 3\text{mA}$ |      |      | VAC                   |
| Insulation Resistance | 500VDC   | $\geq 50 \times 10^6$   |      |      | $\Omega$              |
| Operating Temperature |  | -25   | --   | +70  | $^{\circ}\text{C}$    |
| Storage Temperature   |  | -40   | --   | +85  |                       |
| Storage Humidity      |  | --  | --   | 95   | %RH                   |
| Power Derating        | -25 $^{\circ}\text{C}$ to -10 $^{\circ}\text{C}$ | 2.7   | --   | --   | %/ $^{\circ}\text{C}$ |
|                       | +50 $^{\circ}\text{C}$ to +70 $^{\circ}\text{C}$ | 2.0   | --   | --   |                       |
|                       | 85V-100VAC                                       | 2.0   | --   | --   | %/ $\text{VAC}$       |
|                       | 850V-900VAC                                      | 0.3   | --   | --   |                       |
| Switching Frequency   |  | --  | 65   | --   | kHz                   |
| MTBF                  |  | MIL-HDBK-217F@25 $^{\circ}\text{C}$ $\geq 300,000$ h                |      |      |                       |



### Mechanical Specifications

|                |                          |
|----------------|--------------------------|
| Dimensions     | 138.00 x 82.00 x 32.00mm |
| Weight         | 240g(Typ.)               |
| Cooling method | Free air convection      |

### Electromagnetic Compatibility (EMC)

|          |       |                 |  |                  |
|----------|-------|-----------------|--|------------------|
| Immunity | ESD   | IEC/EN61000-4-2 | Contact $\pm 6\text{KV}$                                       | perf. Criteria B |
|          | RS    | IEC/EN61000-4-3 | 10V/m  | perf. Criteria A |
|          | EFT   | IEC/EN61000-4-4 | $\pm 4\text{KV}$   | perf. Criteria B |
|          | Surge | IEC/EN61000-4-5 | line to line $\pm 2\text{KV}$ /line to ground $\pm 4\text{KV}$ | perf. Criteria B |
|          | CS    | IEC/EN61000-4-6 | 10Vr.m.s   | perf. Criteria A |



### Product Characteristic Curve

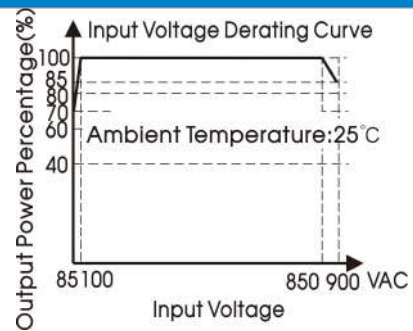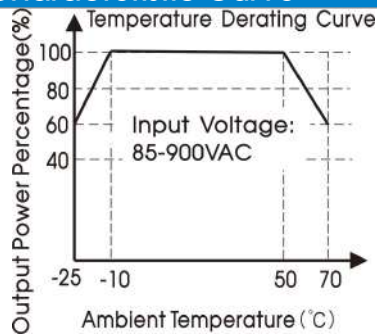

Note: ① With an input between 85 - 100VAC/850 - 900VAC, the output power must be derated as per temperature derating curves;

② The point-solution capacitors have a constant lifetime, the service life depends on the actual ambient temperature, operating in harsh environments can affect the life of a product, shorten the service life of the product, it is not recommended that the product work in high temperature environment below 65 $^{\circ}\text{C}$  for a long time.

③ This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

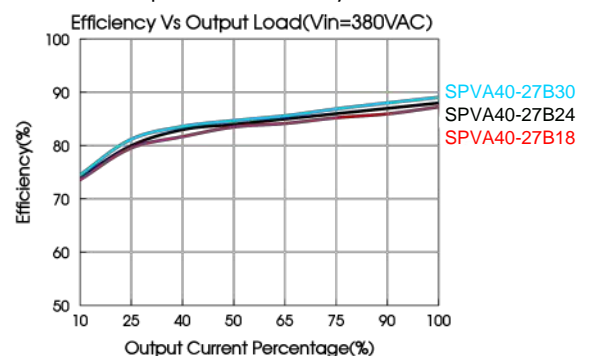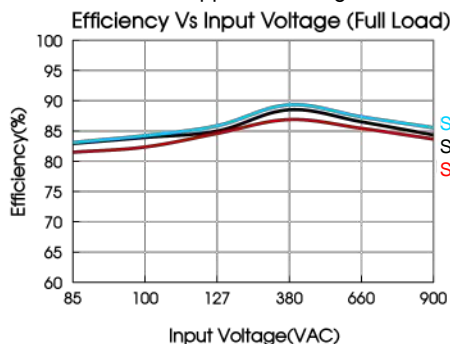

Design Reference

1. Typical application

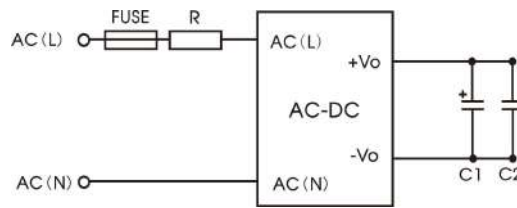



Fig. 1

| Model        | FUSE                 | C1  | C2   | R        |
|--------------|----------------------|-----|------|----------|
| SPVA40-27Bxx | 2A/1000VAC, required | 1uF | 10uF | 1.4Ω/≥5W |

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C1 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C2 is a ceramic capacitor used for filtering high-frequency noise.

2. Trim Function for Output Voltage Adjustment (open if unused)

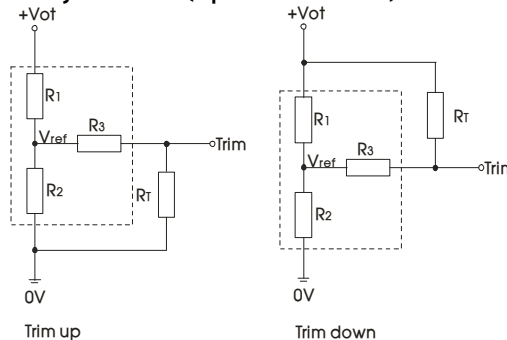

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:

$$\text{up: } R_T = \frac{aR_2}{R_2 - a} - R_3 \quad a = \frac{V_{ref}}{V_{ot} - V_{ref}} \cdot R_1$$


$$\text{down: } R_T = \frac{aR_1}{R_1 - a} - R_3 \quad a = \frac{V_{ot} - V_{ref}}{V_{ref}} \cdot R_2$$

$R_T$  = Trim Resistor value;  
 $a$  = Self-defined parameter;

| Vout | R1(KΩ) | R2(KΩ) | R3(KΩ) | Vref(V) | Vot(V)   |
|------|--------|--------|--------|---------|--|
| 18V  | 6.20   | 1      | 1      | 2.5     | Resulting trimmed output voltage, range ≤ ±10% |
| 24V  | 8.66   | 1      | 1      | 2.5     |  |
| 30V  | 8.80   | 0.79   | 1      | 2.5     |  |

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

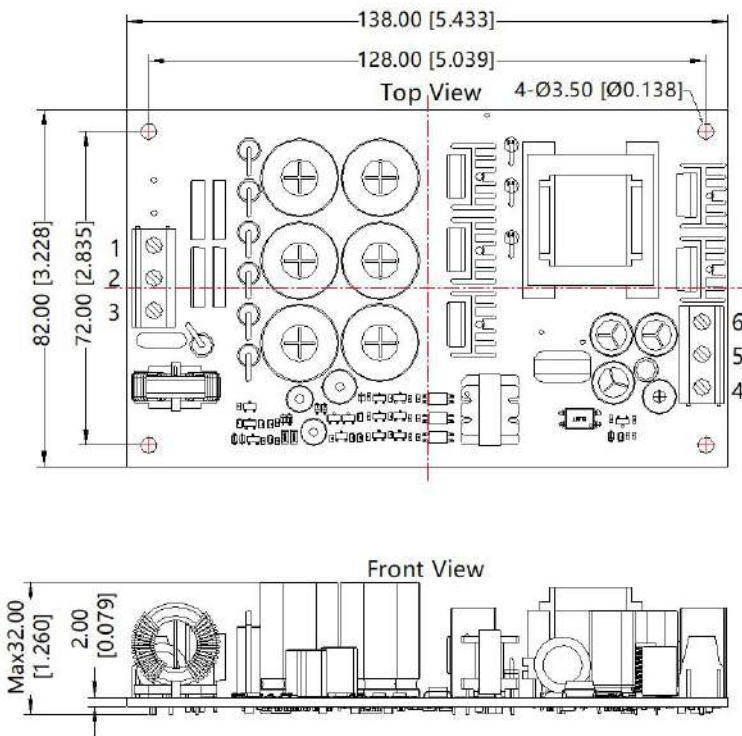

| Pin-Out |          |
|---------|----------|
| Pin     | Function |
| 1       | AC(L)    |
| 2       | NC       |
| 3       | AC(N)    |
| 4       | Trim     |
| 5       | -Vo      |
| 6       | +Vo      |

Note:  
 Unit: mm[inch]  
 Wire range: 24~12AWG  
 Tightening torque: Max 0.4N·m  
 General tolerances:  $\pm 1.00[\pm 0.039]$   
 The layout of the device is for reference only,  
 please refer to the actual product

Note:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75% with nominal input voltage and rated output load;
2. All index testing methods in this datasheet are based on our company corporate standards;
3. We can provide product customization service, please contact our technicians directly for specific information;
4. Products are related to laws and regulations: see "Features" and "EMC";
5. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.