



SMD Common Mode Bead – SSMB Series

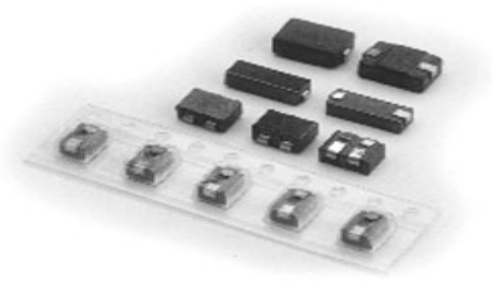

Shapes

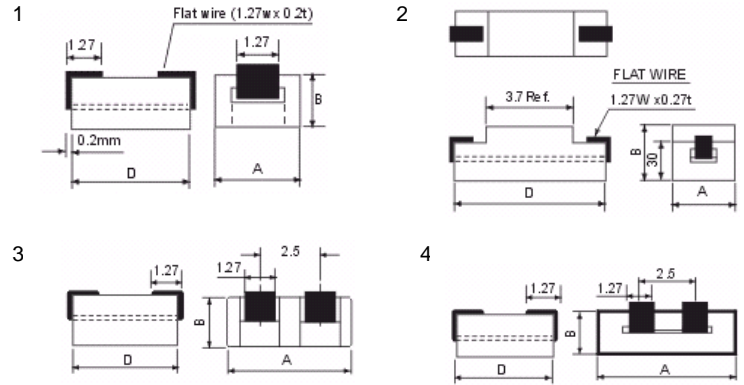

Features

- Supplied taped and reeled per EIA standard
- Applications: Computer disk drive and PC board to filter the EMI from outside source. Car radio, mobile phone.

Ordering Information

SSMB 03-562545 -2H



Characteristics

Part No.	Shape	A	B	D	Impedance (Ω) min		Curve
					25MHz	100MHz	
SSMB13-302540	1	3.18	2.67	4.0 ± 0.25	24	36	1
SSMB12-302585	1	3.18	2.67	8.5 ± 0.25	48	72	2
SSMB03-472976	2	$5.0 +0 -0.5$	$3.45 +0 -0.3$	7.6 ± 0.1	60	90	3
SSMB13-472976	2	$5.0 +0 -0.5$	$3.45 +0 -0.3$	7.6 ± 0.1	58	80	4
SSMB13-562540-2H	3	5.6 ± 0.2	2.5 ± 0.2	4.0 ± 0.25	22	35	5
SSMB03-562545-2H	3	5.6 ± 0.2	2.5 ± 0.2	4.5 ± 0.25	24	36	6
SSMB04-562545-2H	3	5.6 ± 0.2	2.5 ± 0.2	4.5 ± 0.25	18	36	7
SSMB50-562545-2H	3	5.6 ± 0.2	2.5 ± 0.2	4.5 ± 0.25	24	32	8
SSMB47-562585-2H	3	5.6 ± 0.2	2.5 ± 0.2	8.5 ± 0.25	24	35	9
SSMB47-572685-1H2W	4	$5.7 +0.1 -0.5$	$2.6 +0.1 -0.2$	8.47 ± 0.1	48	70	10
SSMB47-562540-2H	3	6.0 ± 0.2	2.5 ± 0.2	4.0 ± 0.25	24	35	11