



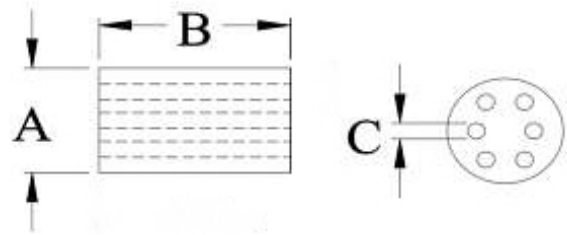

6-Hole Ferrite Bead – SR6H Series

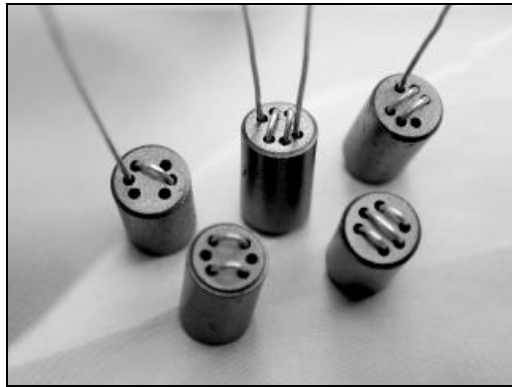


Features

- Compact, medium current, high impedance → EMI suppression component
- Wide Band Coke used in PC products to filter EMI

Ordering Information

SR6H – 1.5Ts

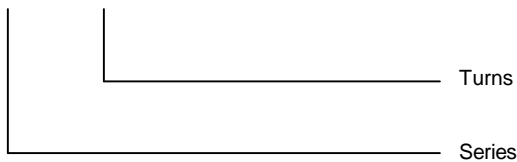


Dimensions

Core	A	B	C	D			
SR6H 6x10	6.0 ± 0.25	10.0 ± 0.30	0.9 ± 0.15	0.5 ± 0.05			
Turns	1.5Ts	2Ts	2.5Ts	3Ts	1.5Ts X2	2.5Ts U	3Ts U
Package	Bulk: 250pcs. / Bag; 1 Box = 6 Bags (1500pcs.)						

Shapes


1.5Ts



2Ts




2.5Ts




3Ts




1.5Ts x2



2.5Ts U



3Ts U






6-Hole Ferrite Bead – SR6H Series


Part No.	Turns (Ts)	Typical Impedance (Ω)		
		10MHz (min)	25MHz (min)	100MHz (min)
SR6H1.0Ts	1.0	58	182	233
SR6H1.5Ts	1.5	170	320	375
SR6H2.0Ts	2.0	240	520	480
SR6H2.5Ts	2.5	320	680	580
SR6H2.5Ts	2.5	400	680	580
SR6H3.0Ts	3.0	400	800	550
SR6H1.5Tsx2	1.5x2	170	320	375

Characteristics


A6 SR6H 2.5Ts

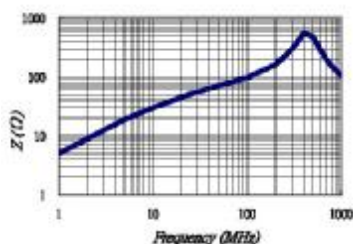


K5B SR6H 1.0Ts




K5B SR6H 1.5Ts




K5B SR6H 1.5Tsx2

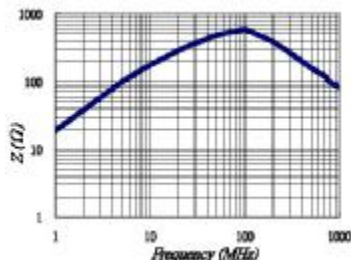

K5B SR6H 2.0Ts

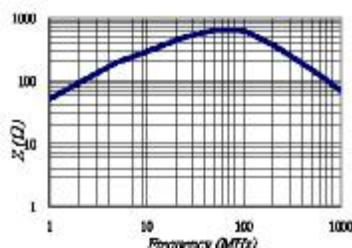

K5B SR6H 2.5Ts

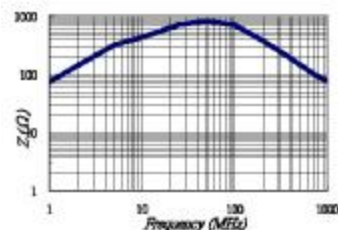

K5B SR6H 3.0Ts

