

Product Feature

- Package Type: SIP8
- Operating Temperature Range: -40°C - +105°C
- Isolation Voltage: 3000VDC
- 2:1 Wide Input Voltage Range
- High efficiency up to 83%
- With the output overcurrent protection and output short circuit protection mechanism
- Fields of application: industry, power, instrumentation, communication, rail transit, etc



Selection Guide

Part No.	Input Voltage (VDC)	Output			Ripple & Noise (Typ./Max.) (mVp-p)	Full Load Efficiency% (Min./Typ.)	Capacitive Load Max. (μF)
	Nominal (Range)	Voltage (VDC)	Current Max.(mA)	Current Min.(mA)			
SWRF 0503 S-3WR4	5 (4.5-9)	3.3	758	38	40/75	67/69	1800
SWRF 0505 S-3WR4		5	500	25		72/74	2200
SWRF 0512 S-3WR4		12	208	10		76/78	680
SWRF 0515 S-3WR4		15	167	8		73/75	470
SWRF 0524 S-3WR4		24	104	5		75/77	330
SWRE 0505 S-3WR4		±5	±250	±13		73/75	#1000
SWRE 0512 S-3WR4		±12	±104	±5		76/78	#470
SWRE 0515 S-3WR4		±15	±83	±4		76/78	#330
SWRE 0524 S-3WR4		±24	±52	±3		75/77	#220
SWRF 1203 S-3WR4	12 (9-18)	3.3	758	38	100/150	74/76	2700
SWRF 1205 S-3WR4		5	600	30		75/77	2200
SWRF 1212 S-3WR4		12	250	13		81/83	680
SWRF 1215 S-3WR4		15	200	10		82/84	470
SWRF 1224 S-3WR4		24	125	6		80/82	330
SWRE 1205 S-3WR4		±5	±300	±15	40/75	77/79	#1000
SWRE 1212 S-3WR4		±12	±125	±6		78/80	#470
SWRE 1215 S-3WR4		±15	±100	±5		79/81	#330
SWRF 2403 S-3WR4	24 (18-36)	3.3	758	38	100/150	72/75	2700
SWRF 2405 S-3WR4		5	600	30		80/82	2200
SWRF 2412 S-3WR4		12	250	13		82/84	680
SWRF 2415 S-3WR4		15	200	10		82/84	470
SWRF 2424 S-3WR4		24	125	6		82/84	330
SWRE 2405 S-3WR4		±5	±300	±15	40/75	78/80	#1000
SWRE 2412 S-3WR4		±12	±125	±6		82/84	#470
SWRE 2415 S-3WR4		±15	±100	±4		82/84	#330
SWRF 4803 S-3WR4	48	3.3	758	38	100/150	74/76	2700

SWRE SWRF S-3WR4



SWRF 4805 S-3WR4		5	600	30	40/75	75/77	2200
SWRF 4812 S-3WR4		12	250	10		79/81	680
SWRF 4815 S-3WR4		15	200	10	70/100	83/85	470
SWRF 4824 S-3WR4		24	104	5		81/83	330
SWRE 4805 S-3WR4		±5	±300	±15	40/75	78/80	#1000
SWRE 4812 S-3WR4		±12	±125	±6		81/83	#470
SWRE 4815 S-3WR4		±15	±100	±5		81/83	#330

each output

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Input Current (full load/no load)	5VDC Input		--	800/60	846/65	mA	
	12VDC Input	3.3VDC Output	--	277/25	286/30		
		Other Output	--	314/25	338/30		
	24VDC Input	3.3VDC Output	--	140/8	145/13		
		Other Output	--	154/8	163/13		
	48VDC Input	3.3VDC Output	--	69/3	72/10		
		Other Output	--	78/3	85/10		
Reflected Ripple Current	5VDC Input		--	20	--		
	12VDC Input		--	20	--		
	24VDC Input		--	55	--		
	48VDC Input		--	55	--		
Impulse Voltage	5VDC Input		-0.7	--	12	VDC	
	12VDC Input		-0.7	--	25		
	24VDC Input		-0.7	--	50		
	48VDC Input		-0.7	--	100		
Starting Voltage	5VDC Input		3.5	4	4.5		
	12VDC Input		4.5	8	9		
	24VDC Input		11	16	18		
	48VDC Input		24	33	36		
Input Filter			Capacitance Filter				
Hot Plug			Unavailable				
CTRL	Module off		0-0.7V turn off				
	Module on		No connect or 3.5-12V on				

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	5% - 100% Load	--	±1.0	±3.0	%
No-load Output Voltage Accuracy	Input Voltage Range	--	±1.5	±5.0	
Linear Regulation	Full load, Input voltage from low limit to high limit	--	±0.2	±0.5	
Load Regulation	5% - 100% Load	--	±0.4	±0.75	
Transient Recovery Time	25% load step change	--	0.5	3	ms
Transient Response Deviation		--	±2.5	±5	%
Temperature Coefficient	Full Load	--	±0.02	±0.03	%/°C
Ripple & Noise	20MHZ Bandwidth	See the selection guide for data			
Short-circuit Protection		Continuous, Self-Recovery			

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output, test time 1 minute, leakage current less than 1mA	3000	--	--	VDC
Insulation Resistance	Input-output, insulated voltage 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V	--	30	50	pF
Operating Temperature	Derating when operating temperature ≥ 85°C, (See Figure 1)	-40	--	+85	°C
Storage Temperature		-55	--	+105	
Storage Humidity	Non-condensing	--	--	95	%RH
Pin welding can withstand the highest temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	300	°C
Switching Frequency	Full Load, Nominal Input Voltage	150	208	300	kHz
MTBF	MIL-HDBK-217F@25°C	>1000Kh			

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL 94V-0 rated)
Package Dimensions	22.00 * 12.00 * 9.50 mm
Weight	3.8g (Typ.)
Cooling Method	Free air convection

EMC Specifications

EMI	CE	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 3-②)
	RE	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 3-②)
EMS	ESD	IEC/EN61000-4-2 Contact±4KV perf.Criteria B
	RS	IEC/EN61000-4-3 10V/m Perf.Criteria A
	EFT	IEC/EN61000-4-4 ±2KV (The recommended circuit is shown in Figure 3-①) Perf.Criteria B
	Surge	IEC/EN61000-4-5 line to line±2KV (The recommended circuit is shown in Figure 3-①) Perf.Criteria B
	Cs	IEC/EN61000-4-6 3 Vr.m.s Perf.Criteria A
	Voltage dips, DIPS and short interruptions	IEC/EN61000-4-29 0%, 70% Perf.Criteria B

Typical Characteristic Curves





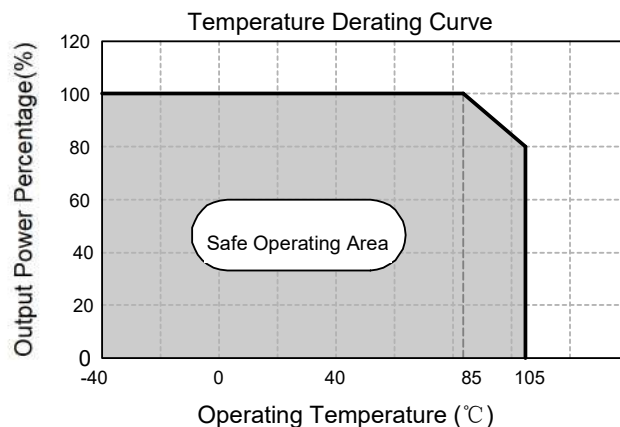


Figure 1

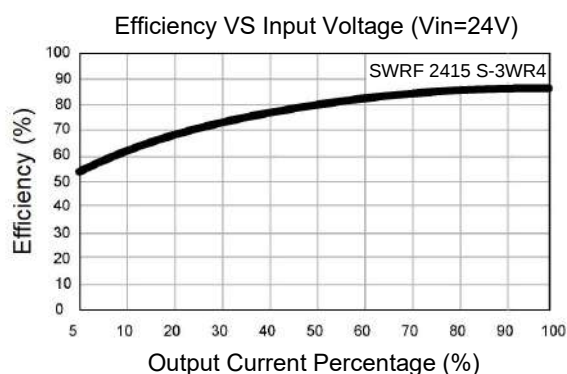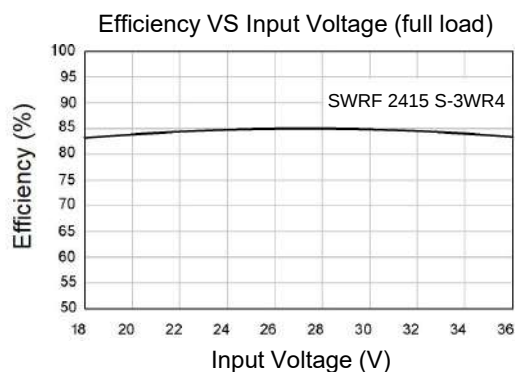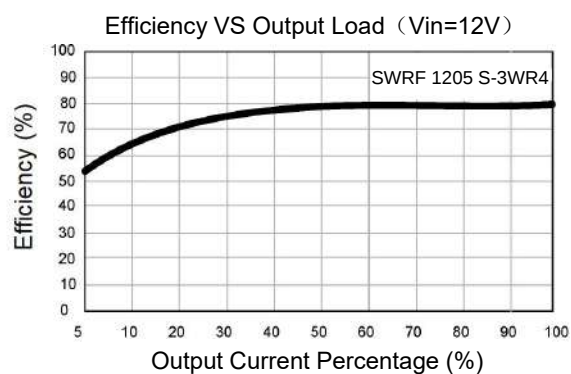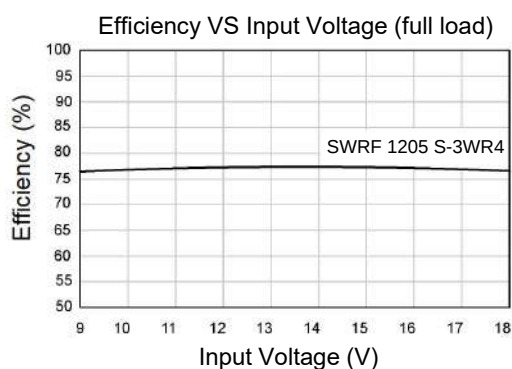

Circuit Design and Application

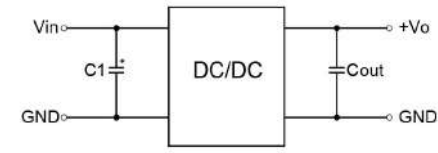


Figure 2

Recommended Capacitive Load Value Table	
Cin(μF)	Cout(μF)
100	22

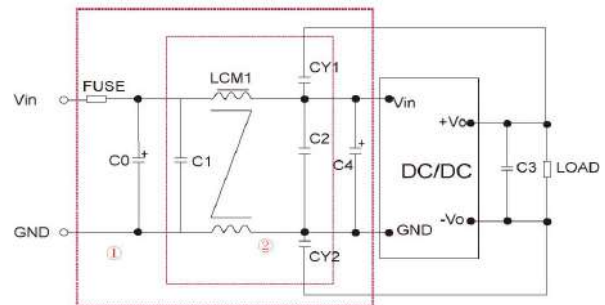


Figure 3

EMI Recommended Parameter Table		
Model	Vin:12V	Vin:24V
FUSE	Select according to the actual input current of the customer	
C0、C4	330uF/35V	330uF/50V
C1、C2	10μF/50V	
LCM1	1.4-1.7mH	
C3	22μF/50V	
CY1、CY2	1nF/400VAC	



Note: Part 1 in Figure 3 is for EMC testing; The second part is used for EMI filtering, which can be selected according to the demand.

- Note:**
- 1.The input voltage cannot exceed the specified range value, otherwise permanent and irreparable damage may be caused ;
 - 2. Unless otherwise specified,the parameters in this datasheet were measured at 25℃ , humidity 40%~75%, input nominal voltage and output pure resistance mode under full load;
 - 3. All index test methods are based on our company's enterprise standards.

Dimensions and Recommended Layout

Dimensions

PCB Printing Layout & Pin Definition Table

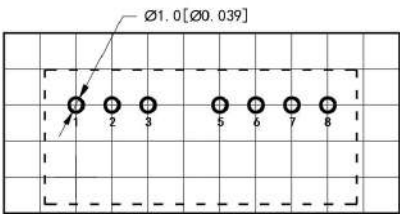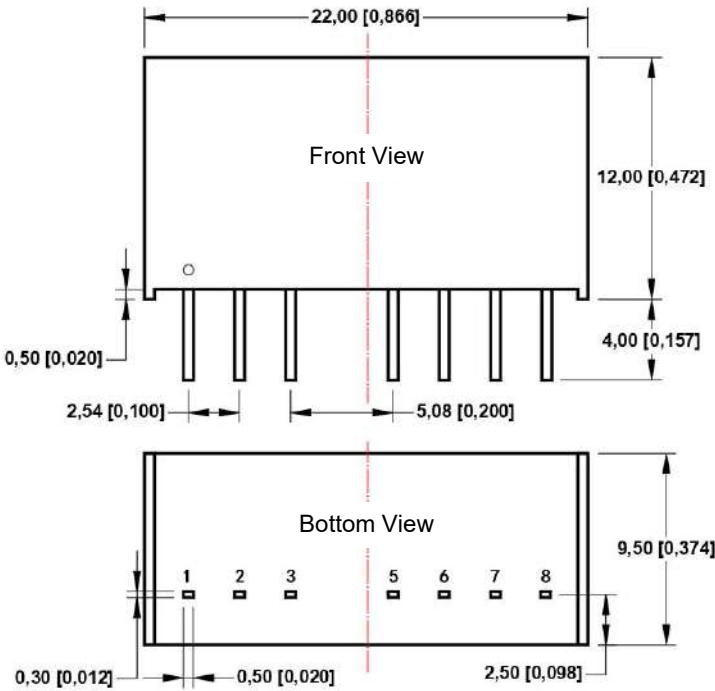

Note: The grid distance is 2.54mm*2.54mm

Pin	Function(single)	Function(double)
1	GND	GND
2	Vin	Vin
3	CTRL	CTRL
5	NC	NC
6	+Vo	+Vo
7	-Vo	COM
8	NC	-Vo

NC: Pin to be isolated from circuitry

Note:
Unit: mm[inch]
Pin section tolerances:±0.10[±0.004]
General tolerances:±0.50[±0.020]